KADN30 SERIES

OPEN FRAME
AC - DC POWER MODULE
25 ~ 30W UL / cUL / TUV / CE

FEATURES

- AC/DC POWER MODULE
- UNIVERSAL INPUT 85 ~ 265 VAC
- HIGH EFFICIENCY UP TO 86%
- SHORT CIRCUIT PROTECTION
- INTERNAL INPUT FILTER
- 2 YEARS WARRANTY
- MEDICAL SAFETY APPROVED
- LOW LEAKAGE CURRENT

MODEL LIST

MODEL NO.	INPUT VOLTAGE	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	CAPACITOR LOAD (max.)
Single Output Models							
KADN3003	85 ~ 265 VAC	25 WATTS	+3.3 VDC	7500 mA	75%	77%	7000 μF
KADN3005	85 ~ 265 VAC	30 WATTS	+ 5 VDC	6000 mA	79%	81%	7000 μF
KADN3012	85 ~ 265 VAC	30 WATTS	+ 12 VDC	2500 mA	83%	85%	7000 μF
KADN3015	85 ~ 265 VAC	30 WATTS	+ 15 VDC	2000 mA	84%	86%	7000 μF
KADN3024	85 ~ 265 VAC	30 WATTS	+ 24 VDC	1250 mA	84%	86%	3500 μF
Dual Output Models							
KADN3012D	85 ~ 265 VAC	30 WATTS	± 12 VDC	± 1250 mA	82%	84%	±7000 μF
KADN3015D	85 ~ 265 VAC	30 WATTS	± 15 VDC	± 1000 mA	83%	85%	±7000 μF
KADN30512D	85 ~ 265 VAC	30 WATTS	+5 / + 12 VDC	+3A / + 1.25A	80%	82%	7000 μF
KADN30524D	85 ~ 265 VAC	30 WATTS	+5 / + 24 VDC	+3A / + 0.625A	80%	82%	7000 μF

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL

Characteristics	Conditions	min.	typ.	max.	unit
Switching frequency	Vi nom, Io nom		65		KHz
Isolation voltage	Input - Output	4236/6000			VAC/VDC
Isolation resistance	Input - Output, @ 500VDC	100			MΩ
Ambient temperature 1)	Operating at Vinom, Io nom	-40		+ 71	°C
Derating	Vi nom, +61 to + 71°C			2.5	% / °C
Storage temperature	Non operational	-40		+100	°C
Relative humidity	Vi nom, Io nom	20		95	% RH
Temperature coefficient	Vi nom, Io min			± 0.03	% / °C

NOTE1 : Pls refer to DERATING CURVE.

KADN30 SERIES

OPEN FRAME
AC - DC POWER MODULE

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL

Characteristics	Conditions		min.	typ.	max.	unit
MTBF	Bellcore issue 6 @40°C, GB	3.3V, 5V, 512D & 524D models		705000		Hours
		12V, 12D & 15D models		724000		Hours
		15V & 24V models		742000		Hours
Altitude during operation					3000	m
Dimension				L85.6 x W60.2 x H24.5		mm
Cooling	Free air convection					

INPUT SPECIFICATIONS

Characteristics	Conditions		min.	typ.	max.	unit
Rated input voltage	Io nom		100		240	VAC
Input voltage range	Ta min ... Ta max, Io nom	AC in	85		265	VAC
		DC in	120		375	VDC
Rated input current	Vi : 115 / 230 VAC, Io nom			0.57-0.34	0.8-0.4	A
Line frequency	Vi nom, Io nom		47		63	Hz
Inrush current	Vi : 115 / 230 VAC, Io nom				20/40	A
Leakage current	Normal condition				100	μA
	Single fault condition				300	μA

OUTPUT SPECIFICATIONS

Characteristics	Conditions		min.	typ.	max.	unit
Output voltage accuracy	Vi nom, Io nom	single output models			±1	%
		dual output models			±2	%
		524D model			±4	%
Minimum load	Vi nom	single output models	0			%
		dual output models (each output)	20			%
Line regulation	Io nom, Vi min ...Vi max				±1	%
Load regulation	Vi nom, Io min ...Io nom	single output models			±1	%
		dual output models			±2	%
Cross regulation (Dual model)	Asymmetrical load 20% / 100% FL				±6	%
Hold up time	Vi : 115 / 230 VAC, Io nom		15/75			ms
Turn on time	Vi nom, Io nom				1000	ms
Rise time	Vi nom, Io nom				150	ms
Fall time	Vi nom, Io nom				150	ms
Transient recovery time	Vi nom, 1~0.5 Io nom				1	ms
Ripple & noise	Vi nom, Io nom, BW = 20MHz				50	mV
External trim ADJ. Range 2) (for single output only)	Io = 5% ...100%		-10		+10	%
Efficiency	Vi nom, Io nom, Po / Pi		Up to 86%, See model list and typ efficiency curve			

NOTE 2 : Pls refer to Fig 1 & Table 1 for connection and resistance recommended.

CONTROL AND PROTECTION

Characteristics	Conditions	min.	typ.	max.	unit
Input fuse			T2A / 250VAC internal		
Internal surge voltage protection	IEC 61000-4-5		Varistor		
Output short circuit			Hiccup mode		
Rated over load protection	Vi nom (see typ current limited curve)	120		160	%

KADN30 SERIES

OPEN FRAME
AC - DC POWER MODULE

SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

APPROVALS AND STANDARDS

UL / cUL	UL 60950-1, UL 60601-1 Recognized
TUV	EN 60950-1, EN 60601-1
CE	EN 60601-1-2, EN 55011, EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3 EN 61000-6-2, EN 55024, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5 EN 61000-4-6, EN 61000-4-8, EN 61000-4-11, EN 61204-3
Vibration resistance	meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)
Shock resistance	meet IEC 60068-2-27 (15G, 11ms, 3 axes, 6 Faces, 3 times for each Face)

PHYSICAL CHARACTERISTICS

Case size	85.6 x 60.2 x 24.5mm (3.37 x 2.37 x 0.96 inches)
Case material	Plastic
Weight	130g

MECHANISM & PIN CONFIGURATION

mm [inch]

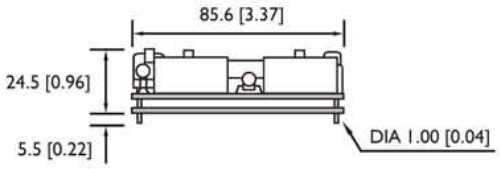

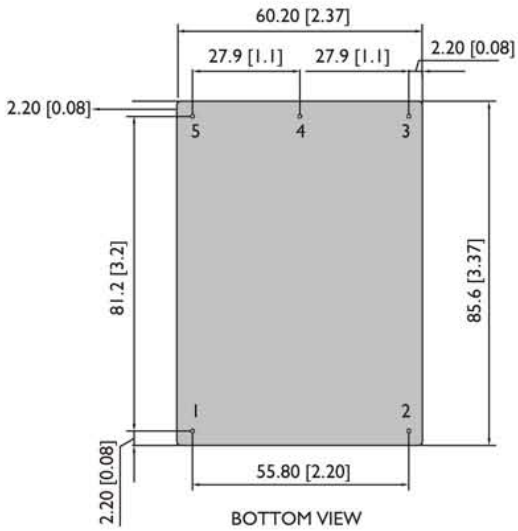

PIN ASSIGNMENT

GENERAL

PIN NO.		1	2	3	4	5
SINGLE		AC IN	AC IN	Vo +	Vo -	Trim
DUAL	12D, 15D	AC IN	AC IN	Vo +	com	Vo -
	512D	AC IN	AC IN	+5V	com	+12V
	524D	AC IN	AC IN	+5V	com	+24V

CIRCUIT SCHEMATIC

• Block diagram for KADN30 series with single output

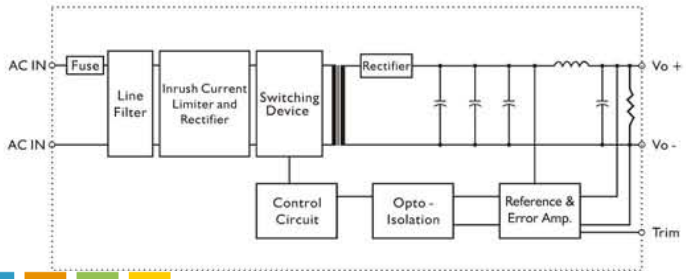

• Block diagram for KADN30 series with dual output

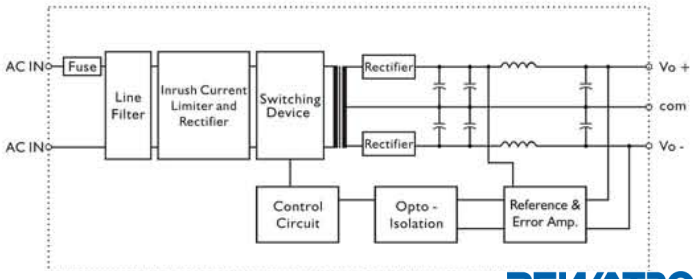

KADN30 SERIES

OPEN FRAME
AC - DC POWER MODULE

CIRCUIT SCHEMATIC

• Block diagram for KADN30512D & KADN30524D

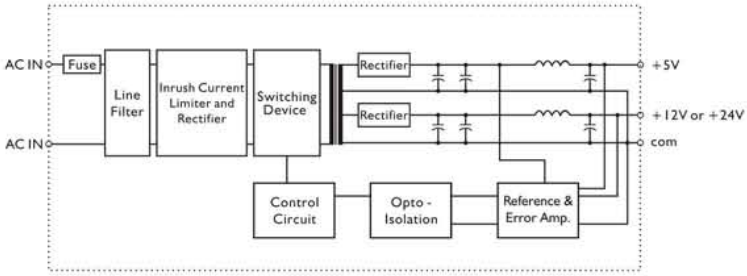

TYP. CURRENT LIMITED CURVE

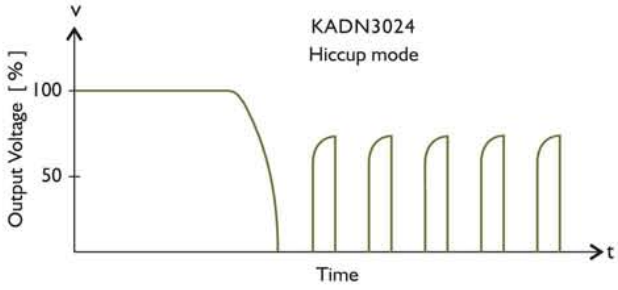

DERATING CURVE

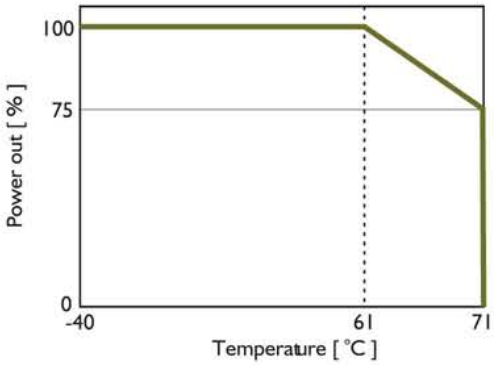

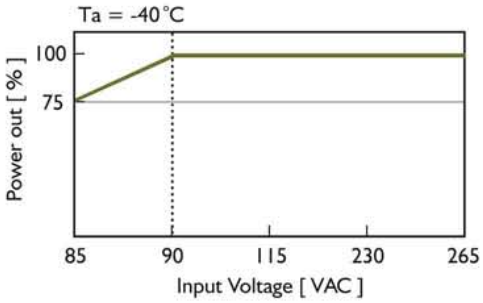

TYP. EFFICIENCY CURVE

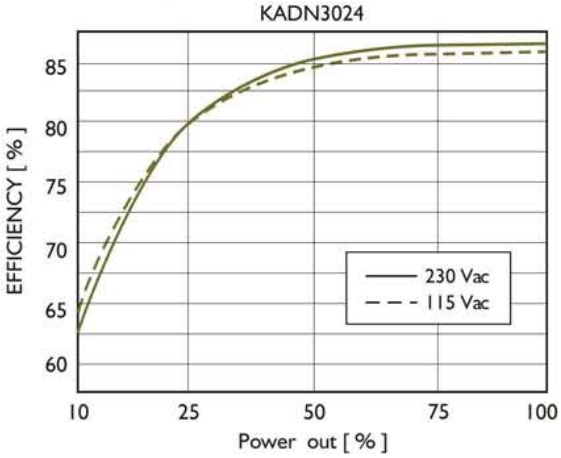

Fig. 1 Trim connection (For single output only)

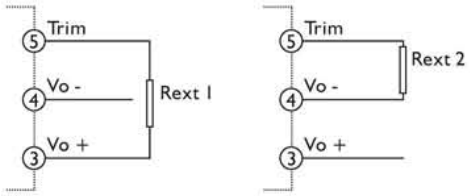

Table 1 Typical resistor values for various output voltage adjustment settings and max continuous power

Type	Rext 1		Rext 2		Max continuous power
	Vo nom -5%	Vo nom -10%	Vo nom +5%	Vo nom +10%	
KADN3003	20KΩ	5.1KΩ	3KΩ	1KΩ	25 W
KADN3005	5.1KΩ	1KΩ	6.8KΩ	2KΩ	30 W
KADN3012	39KΩ	20KΩ	10KΩ	0Ω	30 W
KADN3015	180KΩ	56KΩ	30KΩ	5.1KΩ	30 W
KADN3024	150KΩ	51KΩ	8.2KΩ	0Ω	30 W

PEWATRON
a member of the Angst + Pfister Group

We are here for you. Addresses and Contacts

Sales Switzerland

Postcode 3000 – 9999
Liechtenstein

Matthias Rüegg
Ruhbergstrasse 32
CH-9230 Flawil

Phone + 41 44 877 35 18
Mobile + 41 76 491 66 66
Fax + 41 44 877 35 19

matthias.rueegg@pewatron.com

Postcode 1000 – 2999

Raffael Favaretto
Route d'Oron 124
CH-1673 Promasens

Phone + 41 44 877 35 22
Mobile + 41 76 444 63 14
Fax + 41 44 877 35 23

raffael.favaretto@pewatron.com

Sales Germany

Postcode 60000 – 79999

Dieter Hirthe
Mühlweg 23
D-71554 Weissach i.T.

Phone + 49 719 149 60 58
Mobile + 49 163 762 74 30
Fax + 49 719 193 31 88

dieter.hirthe@pewatron.com

Postcode 10000 – 59999
Postcode 80000 – 99999

Kurt Stritzelberger
Neumarkter Str. 86a
D-81673 Munich

Phone + 49 89 260 38 47
Mobile + 49 171 803 41 35
Fax + 49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

Key Accounts
Aerospace and Defence

Claus Wübbena
Vogelkamp 26
D-26655 Westerstede

Phone + 49 4488 5204 614
Mobile + 49 173 9700 691
Fax + 49 4488 5204 616

claus.wuebbena@pewatron.com

Sales Austria

Kurt Stritzelberger
Neumarkter Str. 86a
D-81673 Munich

Phone + 49 89 260 38 47
Mobile + 49 17 18 03 41 35
Fax + 49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

Sales Other Countries / Product Management

Sensors

Physical Sensors
Data Acquisition

Peter Felder
Phone + 41 44 877 35 05
peter.felder@pewatron.com

Geometrical Sensors

Eric Letsch
Phone + 41 44 877 35 14
eric.letsch@pewatron.com

Power Supplies

DC-DC Converters
Switching Power Supplies
DC-AC Inverters

Sebastiano Leggio
Phone + 41 44 877 35 06
sebastiano.leggio@pewatron.com

E-Components

Current Sensors
Man Machine Interface
Measurement Probes

Sebastiano Leggio
Phone + 41 44 877 35 06
sebastiano.leggio@pewatron.com

PEWATRON AG
Thurgauerstrasse 66
CH-8052 Zurich

Phone + 41 44 877 35 00
Fax + 41 44 877 35 25

www.pewatron.com
info@pewatron.com