MEAN WELL

# 7.2~15W AC-DC Single Output Wall-mounted type GS15E series

■ Features :

- Universal AC input / Full range
- No load power consumption <0.5W
- Meet energy star level IV(CEC) for 5 ~ 48V
- Meet EISA 2007 (Energy Independence and Security Act) for 5 ~ 48V
- 2 pole EURO plug
- Class II power (without earth pin)
- Full output 3~48V safety approval
- Protections: Short circuit / Overload / Over voltage
- Pass LPS
- Fully enclosed plastic case
- Approvals: TUV / CB / FCC / CE
- 2 years warranty

## SPECIFICATION

| ORDER NO. | | GS15E-0P1J | GS15E-1P1J | GS15E-11P1J | GS15E-2P1J | GS15E-3P1J | GS15E-4P1J | GS15E-5P1J | GS15E-6P1J | GS15E-8P1J |
|---|---|---|---|---|---|---|---|---|---|---|
| OUTPUT | SAFETY MODEL NO. | GPSU15E-0 | GPSU15E-1 | GPSU15E-1-1 | GPSU15E-2 | GPSU15E-3 | GPSU15E-4 | GPSU15E-5 | GPSU15E-6 | GPSU15E-8 |
| | DC VOLTAGE Note.2 | 3.3V | 5V | 7.5V | 9V | 12V | 15V | 18V | 24V | 48V |
| | RATED CURRENT | 2.18A | 2.40A | 1.60A | 1.66A | 1.25A | 1.00A | 0.83A | 0.62A | 0.31A |
| | CURRENT RANGE | 0 ~ 2.18A | 0 ~ 2.40A | 0 ~ 1.60A | 0 ~1.66A | 0 ~ 1.25A | 0 ~ 1.00A | 0 ~ 0.83A | 0 ~ 0.62A | 0 ~ 0.31A |
| | RATED POWER | 7.2W | 12W | 12W | 15W | 15W | 15W | 15W | 15W | 15W |
| | RIPPLE & NOISE (max.) Note.3 | 50mVp-p | 50mVp-p | 80mVp-p | 80mVp-p | 80mVp-p | 100mVp-p | 120mVp-p | 150mVp-p | 240mVp-p |
| | VOLTAGE ADJ. RANGE | 3 ~ 5V | 5 ~ 6V | 6 ~ 8V | 8 ~ 11V | 11 ~ 13V | 13 ~ 16V | 16 ~ 21V | 21 ~ 27V | 33 ~ 48V |
| | | Fixed | | | | | | | | |
| | VOLTAGE TOLERANCE Note.4 | ±6.0% | ±5.0% | ±5.0% | ±5.0% | ±3.0% | ±3.0% | ±3.0% | ±2.0% | ±2.0% |
| | LINE REGULATION Note.5 | ±1.0% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% |
| | LOAD REGULATION Note.6 | ±6.0% | ±5.0% | ±5.0% | ±5.0% | ±3.0% | ±3.0% | ±3.0% | ±2.0% | ±2.0% |
| | SETUP, RISE, HOLD UP TIME | 3000ms, 50ms, 16ms at full load | | | | | | | | |
| INPUT | VOLTAGE RANGE | 90 ~ 264VAC 135 ~ 370VDC | | | | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | | | |
| | EFFICIENCY (Typ.) Note.7 | 55% | 65% | 72% | 74% | 76% | 77% | 78% | 80% | 81% |
| | AC CURRENT | 0.5A / 100VAC | | | | | | | | |
| | INRUSH CURRENT (max.) | 50A / 230VAC | | | | | | | | |
| | LEAKAGE CURRENT(max.) | 0.25mA / 240VAC | | | | | | | | |
| PROTECTION | OVERLOAD | 115 ~ 250% rated output power | | | | | | | | |
| | | Protection type : Hiccup mode, recovers automatically after fault condition is removed | | | | | | | | |
| | OVER VOLTAGE | >120% rated output voltage | | | | | | | | |
| | | Protection type : Clamp by zener diode | | | | | | | | |
| ENVIRONMENT | WORKING TEMP. | 0 ~ +50℃ (Refer to output load derating curve) | | | | | | | | |
| | WORKING HUMIDITY | 20% ~ 90% RH non-condensing | | | | | | | | |
| | STORAGE TEMP., HUMIDITY | -20 ~ +85℃, 10 ~ 95% RH | | | | | | | | |
| | TEMP. COEFFICIENT | ±0.03% / ℃ (0 ~ 50℃) | | | | | | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | | | | | | | |
| SAFETY & EMC (Note. 8) | SAFETY STANDARDS | UL60950-1, CSA22.2, EN60950-1 approved | | | | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3KVAC | | | | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P:100M Ohms / 500VDC / 25℃/ 70% RH | | | | | | | | |
| | EMI CONDUCTION & RADIATION | Compliance to EN55022 class B, FCC part 15 Class B | | | | | | | | |
| | HARMONIC CURRENT | Compliance to EN61000-3-2,3 | | | | | | | | |
| | EMS IMMUNITY | Compliance to EN61000-4-2,3,4,5,6,11, light industry level, criteria A | | | | | | | | |
| OTHERS | MTBF | 500Khrs min. MIL-HDBK-217F(25℃) | | | | | | | | |
| | DIMENSION | 34*71*50mm (L*W*H) | | | | | | | | |
| | PACKING | 180g ; 60pcs / 12Kg / CARTON | | | | | | | | |
| CONNECTOR | PLUG | Standard type P1J: 2.1$\phi$ * 5.5$\phi$ * 11mm, tuning fork type center positive for stock ; Other type available by customer requested | | | | | | | | |
| | CABLE | Standard type 18Awg UL1185 6ft and 5ft for 3.3V output only for stock ; Other type available by customer requested | | | | | | | | |

**NOTE**

1. All parameters are specified at 230VAC input, rated load, 25℃ 70% RH ambient.
2. DC voltage: The output voltage set at point measure by plug terminal & 50% load.
3. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
4. Tolerance: includes set up tolerance, line regulation, load regulation.
5. Line regulation is measured from low line to high line at rated load.
6. Load regulation is measured from 0% to 100% rated load
7. Efficiency is measured at 230VAC.
8. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

*File Name:GS15E-SPEC 2008-05-06*

MEAN WELL

7.2~15W AC-DC Single Output Wall-mounted type

# GS15E series

## ■ Mechanical Specification

Unit:mm




## ■ Plug Assignment

Standard plug: P1J (option)

| P1J | |
|---|---|
| P/N | OUTPUT |
| CENTER | + |

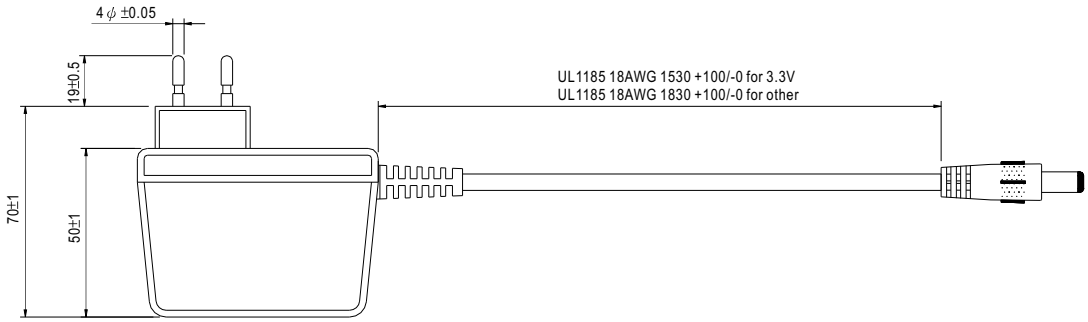


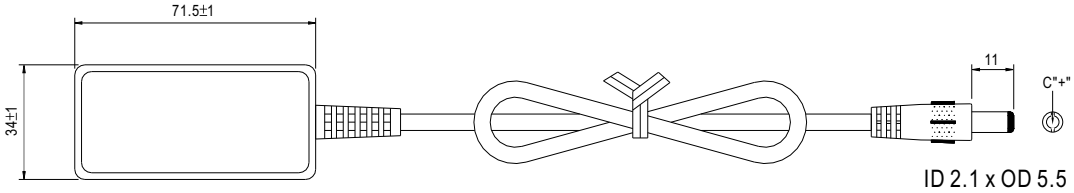


## ■ Derating Curve

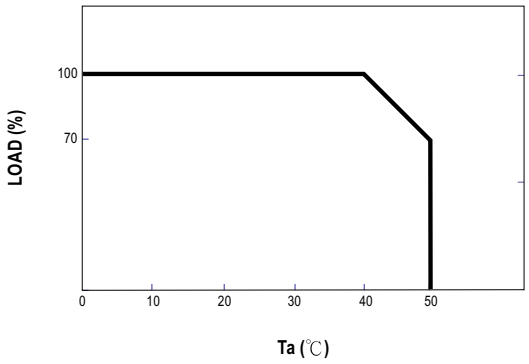


## ■ Static Characteristics

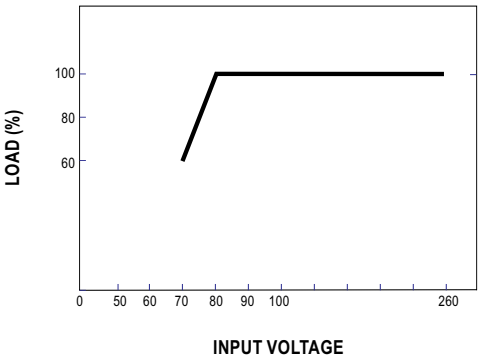


File Name:GS15E-SPEC 2008-05-06

PEWATRON
a member of the Angst + Pfister Group

# We are here for you. Addresses and Contacts

## Sales Switzerland

Postcode 3000 – 9999
Liechtenstein

Matthias Rüegg
Ruhbergstrasse 32
CH-9230 Flawil

Phone + 41 44 877 35 18
Mobile + 41 76 491 66 66
Fax + 41 44 877 35 19

matthias.rueegg@pewatron.com

Postcode 1000 – 2999

Raffael Favaretto
Route d'Oron 124
CH-1673 Promasens

Phone + 41 44 877 35 22
Mobile + 41 76 444 63 14
Fax + 41 44 877 35 23

raffael.favaretto@pewatron.com

## Sales Germany

Postcode 60000 – 79999

Dieter Hirthe
Mühlweg 23
D-71554 Weissach i.T.

Phone + 49 719 149 60 58
Mobile + 49 163 762 74 30
Fax + 49 719 193 31 88

dieter.hirthe@pewatron.com

Postcode 10000 – 59999
Postcode 80000 – 99999

Kurt Stritzelberger
Neumarkter Str. 86a
D-81673 Munich

Phone + 49 89 260 38 47
Mobile + 49 171 803 41 35
Fax + 49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

Key Accounts
Aerospace and Defence

Claus Wübbena
Vogelkamp 26
D-26655 Westerstede

Phone + 49 4488 5204 614
Mobile + 49 173 9700 691
Fax + 49 4488 5204 616

claus.wuebbena@pewatron.com

## Sales Austria

Kurt Stritzelberger
Neumarkter Str. 86a
D-81673 Munich

Phone + 49 89 260 38 47
Mobile + 49 17 18 03 41 35
Fax + 49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

## Sales Other Countries / Product Management

### Sensors

Physical Sensors
Data Acquisition

Peter Felder
Phone + 41 44 877 35 05
peter.felder@pewatron.com

Geometrical Sensors

Eric Letsch
Phone + 41 44 877 35 14
eric.letsch@pewatron.com

### Power Supplies

DC-DC Converters
Switching Power Supplies
DC-AC Inverters

Sebastiano Leggio
Phone + 41 44 877 35 06
sebastiano.leggio@pewatron.com

### E-Components

Current Sensors
Man Machine Interface
Measurement Probes

Sebastiano Leggio
Phone + 41 44 877 35 06
sebastiano.leggio@pewatron.com

PEWATRON AG
Thurgauerstrasse 66
CH-8052 Zurich

Phone + 41 44 877 35 00
Fax + 41 44 877 35 25

www.pewatron.com
info@pewatron.com