

# LPF-60D series



#### Features:

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 90%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- · Fully isolated plastic case
- Fully encapsulated with IP67 level (Note.6)
- $\bullet$  Class  $\scriptstyle \rm II$  power unit, no FG
- Built-in 3 in 1 dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and moving sign applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations
- 3 years warranty



MODEL		LPF-60D-12	LPF-60D-15	LPF-60D-20	LPF-60D-24	LPF-60D-30	LPF-60D-36	LPF-60D-42	LPF-60D-48	LPF-60D-54				
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V				
	CONSTANT CURRENT REGION Note.4	7.2 ~12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V				
	RATED CURRENT	5A	4A	3A	2.5A	2A	1.67A	1.43A	1.25A	1.12A				
	RATED POWER	60W	60W	60W	60W	60W	60.12W	60.06W	60W	60.48W				
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p				
OUTPUT	VOLTAGE TOLERANCE Note.3		±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%	±4.0%				
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
		1000ms, 80m			0ms, 80ms / 23		1	1	1=0.070					
	HOLD UP TIME (Typ.)	16ms/230VA												
		90 ~ 305VAC		15VAC at full I										
	FREQUENCY RANGE	90 ~ 305VAC 127 ~ 431VDC 47 ~ 63Hz												
	POWER FACTOR (Typ.)	PF>0.97/115VAC, PF>0.95/230VAC, PF>0.92/277VAC at full load (Please refer to "Power Factor Characteristic" curve)												
INPUT	EFFICIENCY (Typ.)	86% 87% 88% 89% 90% 90% 90% 90% 90% 90% 90%												
01	AC CURRENT (Typ.)	0.8A / 115VA			0370	3070	30 /0	3070	3070	3070				
	INRUSH CURRENT (Typ.)	0.8A / 115VAC												
	LEAKAGE CURRENT													
	ELANAGE GONNENT	<0.75mA / 240VAC												
	OVER CURRENT Note.4	95 ~ 108%  Protection type: Constant current limiting, recovers outcomplically after fault condition is removed.												
	OLIOPE OIDOUET	Protection type: Constant current limiting, recovers automatically after fault condition is removed  Hiccup mode, recovers automatically after fault condition is removed.												
	SHORT CIRCUIT	15 ~ 17V	54 ~ 63V	59 ~ 66V										
PROTECTION	OVER VOLTAGE		17.5 ~ 21V	23 ~ 27V	28 ~ 35V	34 ~ 40V	41 ~ 49V	46 ~ 54V	54 ~ 63V	39~00V				
		Protection type: Shut down and latch off o/p voltage, re-power on to recover												
	OVER TEMPERATURE	90°C ±10°C (RTH2)												
		Protection type: Shut down o/p voltage, re-power on to recover												
	WORKING TEMP.	,	~ +70°C (Refer to "Derating Curve")											
	WORKING HUMIDITY	20 ~ 95% RH non-condensing												
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80℃,												
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)												
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes												
		UL8750, EN61347-1, EN61347-2-13 independent, J61347-1, J61347-2-13, IP67 approved; Design refer to UL60950-1, TUV EN609												
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75												
EMC	ISOLATION RESISTANCE			'DC / 25°C / 70										
	EMC EMISSION	<u> </u>		N55015, EN61000-3-2 Class C (≧60% load) ; EN61000-3-3										
	EMC IMMUNITY	Compliance to	EN61000-4-2	2,3,4,5,6,8,11;	EN61547, EN5	5024, light indu	ustry level(surg	ge 2KV), criteri	аA					
	MTBF	396.7Khrs mi	n. MIL-HDB	K-217F (25°C)										
OTHERS	DIMENSION	162.5*43.5*3	,											
	PACKING	0, 1	s/15.4Kg/0.930											
NOTE	Ripple & noise are measure     Tolerance: includes set up     Constant current operation reconfirm special electrical r     Derating may be needed ur     Suitable for indoor use or or     Length of set up time is me.     The power supply is conside	y mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  d at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  tolerance, line regulation and load regulation.  egion is within 60% ∼100% rated output voltage. This is the suitable operation region for LED related applications, but please equirements for some specific system design.  der low input voltages. Please check the static characteristics for more details.  tdoor use without direct sunlight exposure. Please avoid immerse in the water over 30 minutes.  saured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.  seried as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the all equipment manufacturers must re-qualify EMC Directive on the complete installation again.												


File Name:LPF-60D-SPEC 2011-07-28







# LPF-60D series

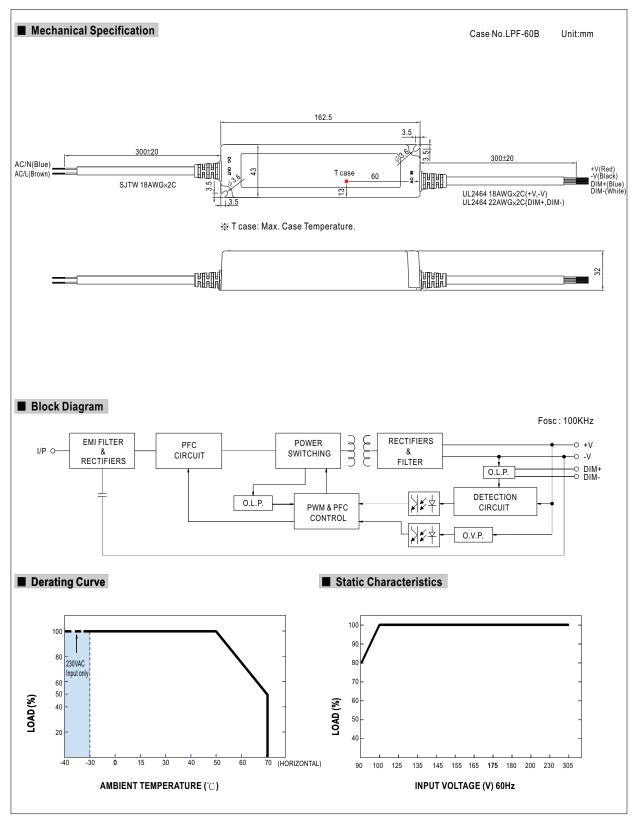


File Name:LPF-60D-SPEC 2011-07-28






LPF-60D series

## ■ Power Factor Characteristic

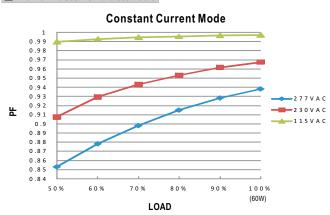

#### **■** EFFICIENCY vs LOAD (48V Model)

 $LPF-60D\ series\ possess\ superior\ working\ efficiency\ that\ up\ to\ 90\%\ can\ be\ reached\ in\ field\ applications.$ 

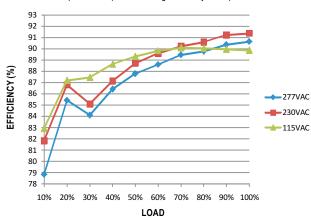


#### ■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

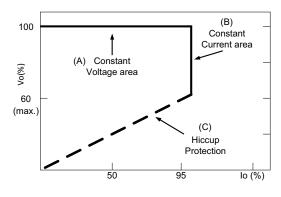

Typical LED power supply I-V curve

File Name:LPF-60D-SPEC 2011-07-28



PEWATRON

a member of the Angel + Pfister Group



## LPF-60D series

#### **■** DIMMING OPERATION



- ※ Please DO NOT connect "DIM-" to "-V".
- X Reference resistance value for output current adjustment (Typical)

Resistance value	<b>10K</b> Ω	<b>20K</b> Ω	<b>30K</b> Ω	<b>40K</b> Ω	<b>50K</b> Ω	<b>60K</b> Ω	<b>70K</b> Ω	<b>80K</b> Ω	90ΚΩ	<b>100K</b> Ω	OPEN
Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%~108%


#### 

Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%~108%

#### imes 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz $\sim$ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Output current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	100%~108%

Dimming connection diagram for turning the lighting fixture  $\mbox{ON/OFF}$ :

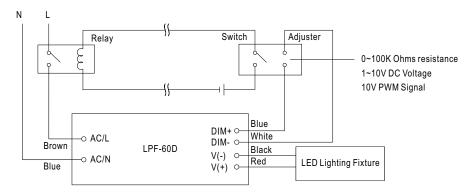

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1. Output constant current level can be adjusted through output cable by connecting a resistor or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.

File Name:LPF-60D-SPEC 2011-07-28



PEWATRON

a member of the Angel + Pfister Group



## We are here for you. Addresses and Contacts

## Sales Switzerland

Postcode 3000-9999 Liechtenstein Postcode 1000-2999

Matthias Rüegg Ruhbergstrasse 32

CH-9230 Flawil

Raffael Favaretto Route d'Oron 124 CH-1673 Promasens

Phone + 41 44 877 35 18 Mobile + 41 76 491 66 66 Fax + 41 44 877 35 19 Phone + 41 44 877 35 22 Mobile + 41 76 444 63 14 Fax + 41 44 877 35 23

matthias.rueegg@pewatron.com

raffael.favaretto@pewatron.com

## Sales Germany

Postcode 60000-79999

Postcode 10000-59999

Postcode 80000 – 99999 Aerospace and Defence

Dieter Hirthe Mühlweg 23 Kurt Stritzelberger Neumarkter Str. 86a D-81673 Munich Claus Wübbena Vogelkamp 26 D-26655 Westerstede

**Key Accounts** 

D-71554 Weissach i.T.
Phone +49 719 149 60 58

Phone + 49 89 260 38 47 Mobile + 49 171 803 41 35 Fax + 49 89 43 10 91 91

Phone + 49 4488 5204 614 Mobile + 49 173 9700 691 Fax + 49 4488 5204 616

Mobile + 49 163 762 74 30 Fax + 49 719 193 31 88

dieter.hirthe@pewatron.com

kurt.stritzelberger@pewatron.com

claus.wuebbena@pewatron.com

### Sales Austria

Kurt Stritzelberger Neumarkter Str. 86a D-81673 Munich

Phone + 49 89 260 38 47 Mobile + 49 17 18 03 41 35 Fax + 49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

## Sales Other Countries / Product Management

## Sensors

Physical Sensors
Data Acquisition

Peter Felder

Phone + 41 44 877 35 05 peter.felder@pewatron.com

**Geometrical Sensors** 

Eric Letsch Phone + 41 44 877 35 14 eric.letsch@pewatron.com

## **Power Supplies**

DC-DC Converters
Switching Power Supplies
DC-AC Inverters

Sebastiano Leggio Phone + 41 44 877 35 06

sebastiano. leggio@pewatron.com

## **E-Components**

Current Sensors
Man Machine Interface
Measurement Probes

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@pewatron.com

#### PEWATRON AG Thurgauerstrasse 66 CH-8052 Zurich

Phone + 41 44 877 35 00 Fax + 41 44 877 35 25

www.pewatron.com info@pewatron.com

Supporting your great ideas