POWER MATE TECHNOLOGY CO.,LTD.

DU1P0-SERIES



FEATURES

- 1 WATT UNREGULATED OUTPUT POWER
- OUTPUT CURRENT UP TO 0.2A
- SINGLE-IN-LINE PACKAGE (SIP)
- HIGH EFFICIENCY FOR LOW POWER APPLICATION
- INPUT RANGE FROM 4.5VDC TO 5.5VDC, 10.8VDC TO 13.2 VDC, 13.5VDC TO 16.5VDC AND 21.6VDC TO 26.4VDC
- UL 94-V0 NON-CONDUCTED CASE
- INTERNAL INPUT & OUTPUT FILTER
- INPUT / OUTPUT ISOLATION UP TO 3KVDC
- SUFFIX-N ISOLATION LEVEL REINFORCE
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

OPTIONS

3KV ISOLATION

DESCRIPTION

The DU1P0 series are the standard building blocks for on-board distributed power systems. They are ideally suited to provide single and dual supplies on primarily digital boards with added benefit of galvanic isolation to reduce switching noise.

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25ºC otherwise noted

OUTPUT SPECIFICATIONS			
Output power			1 Watt, max.
Voltage accuracy	Full load and nominal Vin		± 5%
Minimum load (Note 6)			10% of FL
Line regulation	LL to HL at Full Load		1.3% / 1% of Vin
Load regulation	20% to 100% FL	5V output others	± 10% ± 8%
Ripple and noise	20MHz bandwidth		See table
Temperature coefficient			±0.1% / ºC, max.
Short circuit protection			Short term

GENERAL SPECIFICATIONS			
Efficiency			See table
Isolation voltage	Input to Output	Standard Suffix-N	1000VDC, min. 3000VDC, min.
Isolation resistance			10^9 ohms, min.
Isolation capacitance			30pF, max.
Switching frequency			60KHz, min.
Approvals and standard			IEC60950-1, UL60950-1, EN60950-1
Case material			Non-conductive black plastic
Base material			None
Potting material			Epoxy (UL94-V0)
Dimensions			0.77 X 0.24 X 0.40 Inch (19.6 X 6.1 X 10.2 mm)
Weight			2.0g (0.071oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332 MIL-HDBK-217F		1.471×10^7 hrs 1.238×10^7 hrs

INPUT SPECIFICATIONS		
Input voltage range	5V nominal input 12V nominal input 15V nominal input 24V nominal input	4.5 – 5.5VDC 10.8 – 13.2VDC 13.5 – 16.5VDC 21.6 – 26.4VDC
Input filter		Capacitor

ENVIRONMENTAL SPECIFICATIONS	
Operating ambient temperature	-25ºC ~ +85ºC (with derating)
Storage temperature range	-55ºC ~ +105ºC
Thermal shock	MIL-STD-810F
Vibration	MIL-STD-810F
Relative humidity	5% to 95% RH

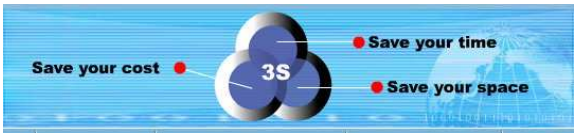

Supporting your great ideas
www.pewatron.com
PEWATRON
a member of the Angst + Pfister Group

P-DUKE

POWER MATE TECHNOLOGY CO.,LTD.

1 WATTS DC-DC CONVERTER

Model Number	Input Range	Output Voltage	Output Current		Output (4) Ripple & Noise	Input Current		Eff (4) (%)	Capacitor Load max(5)
			Min. load	Full load		No load(3)	Full load(2)		
DU1P0-05S05	4.5 – 5.5 VDC	5 VDC	20mA	200mA	100mVp-p	42mA	274mA	77	330μF
DU1P0-05S12	4.5 – 5.5 VDC	12 VDC	8.3mA	83mA	100mVp-p	32mA	255mA	82	330μF
DU1P0-05S15	4.5 – 5.5 VDC	15 VDC	6.7mA	67mA	100mVp-p	35mA	261mA	81	330μF
DU1P0-05D05	4.5 – 5.5 VDC	± 5 VDC	± 10mA	± 100mA	100mVp-p	40mA	270mA	78	±150μF
DU1P0-05D12	4.5 – 5.5 VDC	± 12 VDC	± 4.2mA	± 42mA	100mVp-p	35mA	258mA	82	±150μF
DU1P0-05D15	4.5 – 5.5 VDC	± 15 VDC	± 3.3mA	± 33mA	100mVp-p	40mA	257mA	81	±150μF
DU1P0-12S05	10.8 – 13.2 VDC	5 VDC	20mA	200mA	100mVp-p	17mA	114mA	77	330μF
DU1P0-12S12	10.8 – 13.2 VDC	12 VDC	8.3mA	83mA	100mVp-p	17mA	106mA	82	330μF
DU1P0-12S15	10.8 – 13.2 VDC	15 VDC	6.7mA	67mA	100mVp-p	18mA	112mA	79	330μF
DU1P0-12D05	10.8 – 13.2 VDC	± 5 VDC	± 10mA	± 100mA	100mVp-p	18mA	114mA	77	±150μF
DU1P0-12D12	10.8 – 13.2 VDC	± 12 VDC	± 4.2mA	± 42mA	100mVp-p	18mA	109mA	81	±150μF
DU1P0-12D15	10.8 – 13.2 VDC	± 15 VDC	± 3.3mA	± 33mA	100mVp-p	18mA	106mA	82	±150μF
DU1P0-15S05	13.5 – 16.5 VDC	5 VDC	20mA	200mA	100mVp-p	20mA	97mA	73	330μF
DU1P0-15S12	13.5 – 16.5 VDC	12 VDC	8.3mA	83mA	100mVp-p	18mA	89mA	79	330μF
DU1P0-15S15	13.5 – 16.5 VDC	15 VDC	6.7mA	67mA	100mVp-p	18mA	88mA	80	330μF
DU1P0-15D05	13.5 – 16.5 VDC	± 5 VDC	± 10mA	± 100mA	100mVp-p	18mA	94mA	75	±150μF
DU1P0-15D12	13.5 – 16.5 VDC	± 12 VDC	± 4.2mA	± 42mA	100mVp-p	16mA	88mA	80	±150μF
DU1P0-15D15	13.5 – 16.5 VDC	± 15 VDC	± 3.3mA	± 33mA	100mVp-p	16mA	87mA	80	±150μF
DU1P0-24S05	21.6 – 26.4 VDC	5 VDC	20mA	200mA	100mVp-p	12mA	61mA	72	330μF
DU1P0-24S12	21.6 – 26.4 VDC	12 VDC	8.3mA	83mA	100mVp-p	12mA	56mA	78	330μF
DU1P0-24S15	21.6 – 26.4 VDC	15 VDC	6.7mA	67mA	100mVp-p	10mA	57mA	78	330μF
DU1P0-24D05	21.6 – 26.4 VDC	± 5 VDC	± 10mA	± 100mA	100mVp-p	12mA	59mA	75	±150μF
DU1P0-24D12	21.6 – 26.4 VDC	± 12 VDC	± 4.2mA	± 42mA	100mVp-p	10mA	57mA	78	±150μF
DU1P0-24D15	21.6 – 26.4 VDC	± 15 VDC	± 3.3mA	± 33mA	100mVp-p	10mA	55mA	79	±150μF

Note
1. BELLCORE TR-NWT-000332. Case 1: 50% Stress, Temperature at 40ºC.
   MIL-HDBK-217F Notice2 @Ta=25 ºC, Full load(Ground, Benign, controlled environment).
2. Maximum value at nominal input voltage and full load of standard type.
3. Typical value at nominal input voltage and no load.
4. Typical value at nominal input voltage and full load.
5. Test by minimum Vin and constant resistive load.
6. The output requires a minimum loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.

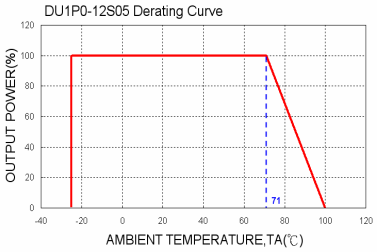

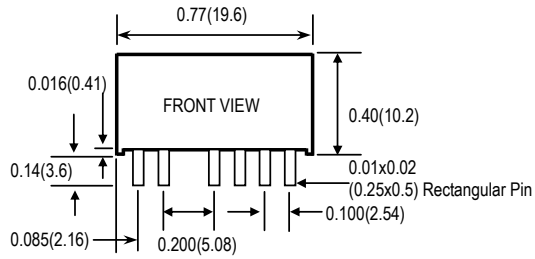

STANDARD		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
4	- OUTPUT	- OUTPUT
5	NC	COMMON
6	+ OUTPUT	+ OUTPUT

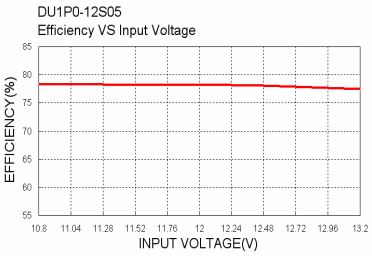

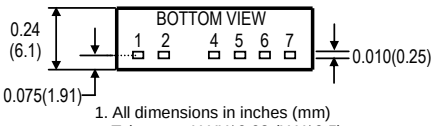

1. All dimensions in inches (mm)
   Tolerance: X.XX±0.02 (X.X±0.5)
   X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01(0.25)
3. Pin dimension tolerance ±0.004 (0.1)

"N" Models		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
5	- OUTPUT	- OUTPUT
6	NC	COMMON
7	+ OUTPUT	+ OUTPUT

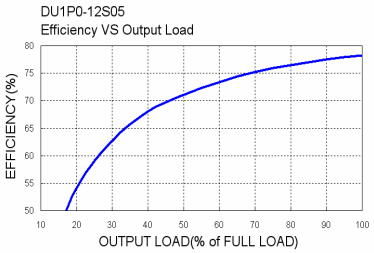

Supporting your great ideas www.pewatron.com PEWATRON a member of the Angst + Pfister Group

PEWATRON
a member of the Angst + Pfister Group

We are here for you. Addresses and Contacts

Sales Switzerland

Postcode 3000 – 9999
Liechtenstein

Matthias Rüegg
Ruhbergstrasse 32
CH-9230 Flawil

Phone + 41 44 877 35 18
Mobile + 41 76 491 66 66
Fax + 41 44 877 35 19

matthias.rueegg@pewatron.com

Postcode 1000 – 2999

Raffael Favaretto
Route d'Oron 124
CH-1673 Promasens

Phone + 41 44 877 35 22
Mobile + 41 76 444 63 14
Fax + 41 44 877 35 23

raffael.favaretto@pewatron.com

Sales Germany

Postcode 60000 – 79999

Dieter Hirthe
Mühlweg 23
D-71554 Weissach i.T.

Phone + 49 719 149 60 58
Mobile + 49 163 762 74 30
Fax + 49 719 193 31 88

dieter.hirthe@pewatron.com

Postcode 10000 – 59999
Postcode 80000 – 99999

Kurt Stritzelberger
Neumarkter Str. 86a
D-81673 Munich

Phone + 49 89 260 38 47
Mobile + 49 171 803 41 35
Fax + 49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

Key Accounts
Aerospace and Defence

Claus Wübbena
Vogelkamp 26
D-26655 Westerstede

Phone + 49 4488 5204 614
Mobile + 49 173 9700 691
Fax + 49 4488 5204 616

claus.wuebbena@pewatron.com

Sales Austria

Kurt Stritzelberger
Neumarkter Str. 86a
D-81673 Munich

Phone + 49 89 260 38 47
Mobile + 49 17 18 03 41 35
Fax + 49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

Sales Other Countries / Product Management

Sensors

Physical Sensors
Data Acquisition

Peter Felder
Phone + 41 44 877 35 05
peter.felder@pewatron.com

Geometrical Sensors

Eric Letsch
Phone + 41 44 877 35 14
eric.letsch@pewatron.com

Power Supplies

DC-DC Converters
Switching Power Supplies
DC-AC Inverters

Sebastiano Leggio
Phone + 41 44 877 35 06
sebastiano.leggio@pewatron.com

E-Components

Current Sensors
Man Machine Interface
Measurement Probes

Sebastiano Leggio
Phone + 41 44 877 35 06
sebastiano.leggio@pewatron.com

PEWATRON AG
Thurgauerstrasse 66
CH-8052 Zurich

Phone + 41 44 877 35 00
Fax + 41 44 877 35 25

www.pewatron.com
info@pewatron.com