

MS7000.3 / Single axis analog accelerometer in TO8

30S.MS7XXX.J.05.11

Energy Mil/Aerospace



Seismic

Features

- ±2g and ±10g range
- Good bias stability (less than 0.1% of full scale)
- Single power supply (+2.5V to +5.5V, ratiometric voltage output)
- Low power
- TO8 packaging (Ø 15.55mm x 3.9mm without pin)
- Individually calibrated (bias, scale factor and non linearity)
- Harsh environment (Vibration, shock, temperature)
- RoHS compliant



The MS7000 product is a single axis MEMS capacitive accelerometer based on a bulk micro-machined silicon element designed for generic requirements, a low power ASIC for signal conditioning and a micro-controller for storage of compensation values. The product is low power, fully calibrated at 3V, robust and extremely stable.

It operates from a single power supply voltage (between +2.5V and +5.5V) with low current consumption (< 0.2mA at 3V). The output is a ratiometric analog voltage that varies between +0.5V and +2.5V for the full-scale acceleration range at a voltage supply of +3V. The sensor is fully self-contained and packaged in a TO8, 12 pins housing, thus insuring a full hermeticity.

Accelerometer specifications

All values are specified at +20°C (+68°F) and 3.0 VDC supply voltage, unless otherwise stated

	Units	MS7002	MS7010	
Full scale range	g	± 2g	± 10g	
Bias calibration	mg	< 10	< 50	
One year bias stability @ 6000g [1]	mg typ. (max.)	2 (< 6)	10 (< 30)	
Bias temp. coefficient [2]	mg/°C typ.	< 0.1	< 0.5	
	mg/°C max.	± 0.4	± 2	
Scale factor sensitivity (K1)	mV/g	500 ± 4	100 ± 1	
One year scale factor stability [1]	ppm typ. (max.)	500 (< 1000)	500 (< 1000)	
Scale factor temp. coefficient [2]	ppm / °C typ.	100	100	
	min. / max.	-50 / 250	-50 / 250	
Input axis misalignment (Kp, Ko)	mrad max.	< 10	< 10	
	% max	1	1	
Resolution / Threshold (@ 1Hz)	mg max.	< 0.1	< 0.6	
Non linearity	% of FS max.	< 0.8	< 0.9	
	g max.	< 0.02	< 0.09	
Bandwidth [3]	Hz	0 to ≥ 800	0 to ≥ 650	
Noise spectral density in band	μV/√Hz typ.	7	7	
(0; 9kHz)	max.	18	18	
Resonant frequency	kHz	1.4	3.7	

 ^[1] One year stability defined according to IEEE 528-2001: turn on / on, storage at -55°C and 85°C, -40°C to 125°C T cycling, -55°C to 85°C unpowered harass, vibration, shock (6000g, single shock).
 [2] Temperature coefficients are specified for a range of -40°C to 20°C, where temperature behavior is typically linear and coefficient are maximum.
 [3] The bandwidth is defined as the frequency band for which the sensitivity has decreased by less than 3dB.












Environmental specifications

	MS7002 MS7010	
Operating temperature range	-40°C to +125°C (-40°F to 255°F)	
Reliability	Results based on MIL-HDBK-217, notice 2, are available on request.	
Shock resistance	Up to 6'000 g (0.15ms half-sine, single shock, not repetitive, in one direction o, p or i)	
Recovery time	< 1ms (1000g, half-sine period 1ms, shocks in direction i)	
Vibration	20 g rms, 20-2000 Hz (random noise, 30 minutes in each direction o, p, i)	
ESD sensitivity	Class 2 (requirements MIL-STD-883-G, 1 Method 3015.7), Human Body Model 2kV	
Ultrasonic cleaning	The product can't be cleaned with ultrasonic bath. Such a cleaning process will largely affect the sensor integrity	

Packaging

The packaging is a standard TO8 housing with a total of 12 pins. The precise dimensions are given in the next figure and the weight of the final product is typically smaller than 2.6 grams

The sealing process is qualified according to the MIL-STD-883-G and systematical leak tests are performed up to 5·10⁻⁸ atm·cm³/s.

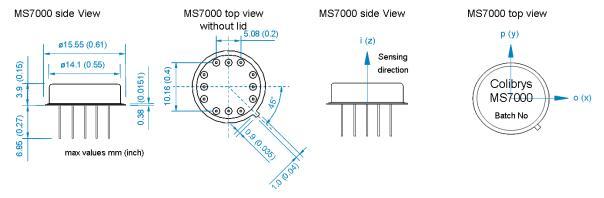

Mounting

The MS7000 is RoHS compliant. Thanks to the 12 pins through the PCB, the MS7000 is tightly fixed to the PCB, using the bottom of the housing as reference plane to ensure a good axis alignment. The stress induced by the soldering is a specific MEMS concern, especially when it comes to high-end capacitive sensors. In order to obtain good stress homogeneity and the best long term stability, all the pins of the accelerometer must be soldered to the PCB.

Physical specifications

	MS7002 MS7010		
Packaging	TO8, 12 pin housing		
Hermeticity	The product has been qualified according to MIL-STD-833-G. Hermetic sealing is systematically qualified a $5\cdot 10^{-8}$ atm·cm³/s		
Weight	< 2.6 grams		
Size	Max. Ø 15.55mm x 3.9mm height without pins (Ø 0.61inch x 0.15inch height without pins)		
Proximity effect	The sensor is sensitive to external parasitic capacitance. Moving metallic objects with large mass or pa effect at proximity of the accelerometer (mm range) must be avoided to insure best product performances		
Reference plane for axis alignment	TO8 must be tightly fixed to the PCB, using the bottom of the housing as reference plane for axis alignment. Using the lid as reference plane or for assembly may affect specifications and product reliability (i.e. axis alignment and/or lid soldering integrity)		

P +41 32 720 58 11 | F +41 32 720 57 84 www.colibrys.com

Maladière 83 | 2000 Neuchâtel | Switzerland







Principle of operation

The standard calibration voltage for the MS7000.3 is (VDD-VSS) = 3V. Therefore, all specifications are valid for this supply voltage unless otherwise stated. Upon market request, the calibration of the product at a different voltage (between 2.5V and 5.5V) is possible. In such a case, the nominal output signal will vary according to the following equation:

```
Vout = (VDD - VSS) / 2 + Ai · (K1 · VDD / 3 )

VAGND = (VDD - VSS) / 2
```

According to this equation (1), the bias and scale factor are ratiometric to the power supply voltage.

A reference voltage VAGND is also provided at half of the power supply and corresponds to the output voltage at zero g. All sensors are calibrated to match the ideal response curve in term of offset, gain and non-linearity.

At every power-up, the microcontroller, used as memory, transfers the calibration parameters to the ASIC and then goes in a sleep mode. During this initialization phase, which takes less than 50ms, the current consumption goes up to max. 1mA @ 5V and at room temperature. Then, the normal operating current is set and remains less than $200\mu A$ under similar conditions.

The following model describes each sensor:

Vout = k_{1} · $(k_0+A_i+k_2A_i^2+k_3A_i^3+k_pA_p+k_oA_o+k_{ip}A_iA_p+k_{io}A_iA_o+E)$

where

- Ai, Ap, Ao are the accelerations for each axes of the sensor with:
 - I: input axis (z axis)
 - p: pendulous axis (y axis)
 - o: output axis, also named pivot or hinge axis (x axis)
- K1 is accelerometer scale factor [V/g]
- K0 is bias [g]
- K2 is second order non linearity [g/g2]
- K3 is third order non-linearity [g/g3]
 Kp is pendulous cross axis non linearity [rad]
- Ko is output cross axis non linearity [rad]
- Kip, Kio are cross-coupling coefficients [rad/g]
- E is the residual noise [g]

Electrical specifications

	MS7002 MS7010	
Input voltage (VDD – VSS)	2.5 to 5.5 VDC. The standard voltage for calibration is 3.0 VDC.	
Output voltage range	From 0.5 to 2.5 VDC @ 3.0 VDC input voltage (VDD/2 at 0g)	
Operating current consumption	< 200 μA @ 3.0 VDC	
Initialization & reset current consumption	Typ. 1000 μA @ 3.0 VDC during the initialization phase (less than 50 ms at room temperature)	
Reset	Reset can only be done by a complete switch off of VDD	
Output impedance / load	Min. 50 kΩ at Vout (pin 2) and VAGND (pin 5)	
	Max. 50 pF at Vout (pin 2) and Max. 100 μF at VAGND (pin 5)	

Temperature compensation

The MS7000 delivers an output signal without any internal temperature compensation.










Sensor connections and power supply requirements

The detailed block diagram is given in the next figure

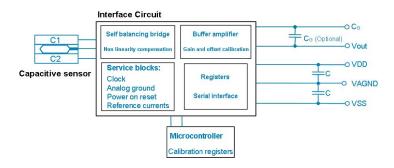

Components in the TO8 packaging:

- 1-axis silicon MEMS sensor
- ASIC
- Microcontroller

It is strongly recommended to use decoupling capacitors [C] of $1\mu F$ each between VDD and VAGND and between VAGND and VSS, placed as close as possible from the accelerometer. COG or X7R @ 5% capacitor types are recommended. On top, the VAGND track should be as short as possible. Any other setup will potentially affect the bias calibration and stability.



MS8000 Description	Notes	
Vout	Accelerometer output signal	
CG	Bandwidth adjustment	
VSS	Ground	
VAGND	Accelerometer output reference voltage (VDD / 2)	
VDD	Power supply	
VPP (Colibrys internal calibration pin)	Must be connected to VSS	
SCK (Colibrys internal calibration pin)	Must be connected to VSS	
SDA (Colibrys internal calibration pin)	Must be connected to VSS	
	Vout CG VSS VAGND VDD VPP (Colibrys internal calibration pin) SCK (Colibrys internal calibration pin)	

Note: An external capacitor Cg can be added to reduce the output bandwidth of the sensor. It is anyway recommended to use this option only for development purpose. In production, an external filter will be much more stable over temperature and over time.

Quality







- Colibrys is in compliant with the European Community Regulation on chemicals and their safe use (EC 1907/2006) REACH.
- MS7000 products comply with the EU-RoHS directive 2002/95/EC (Restrictions on hazardous substances) regulations.
- MS7000 products are complaints with the Swiss LSPro: 930.11 dedicated to the security of products



Note:

- MS7000 accelerometers are available for sales to professional only
- Les accéléromètres MS7000 ne sont disponibles à la vente que pour des clients professionnels
- Die Produkte der Serie MS7000 sind nur im Vertrieb für kommerzielle Kunden verfügbar
- Gli accelerometri MS7000 sono disponibili alla vendita soltanto per clienti professionisti
- Recycling: please use appropriate recycling process for electrical and electronic components







4 of 5



Glossary of parameters of the Data Sheet

g [m/s²]

Unit of acceleration, equal to standard value of the earth gravity (Accelerometer specifications and data supplied by Colibrys use 9.80665 m/s²)

Bias [mg]

The accelerometer output at zero g

Bias stability [mg]

Maximum drift of the bias after extreme variation of external conditions (aging, temperature cycles, shock, vibration)

Bias temperature coefficient [μg /°C]

Maximum variation of the bias calibration under variable external temperature conditions (slope of the best fit straight line through the curve of bias vs. temperature). Bias Temperature Coefficient is specified between -40°C and +50°C, where temperature behaviour is linear

Scale factor sensitivity [mV/g]

The ratio of the change in output (in volts) to a unit change of the input (in units of acceleration); thus given in mV/g

Scale factor temperature coefficient [ppm/°C1

Maximum deviation of the scale factor under variable external temperature conditions

Temperature sensitivity

Sensitivity of a given performance characteristic (typically scale factor, bias, or axis misalignment) to operating temperature, specified as worst case value over the full operating temperature range. Expressed as the change of the characteristic per degree of temperature change; a signed quantity, typically in ppm/°C for scale factor and g/°C for bias. This figure is useful for predicting maximum scale factor error with temperature, as a variable when modelling is not accomplished

Axis alignment [mrad]

The extent to which the accelerometer's true sensitive axis deviates from being perfectly orthogonal to the accelerometer's reference mounting surface when mounted to a flat surface

Resolution, Threshold [mg]

Value of the smallest acceleration that can be significantly measured

Non-linearity [% of FS]

The maximum deviation of accelerometer output from the best linear fit over the full operating range. The deviation is expressed as a percentage of the full-scale output $(+A_{FS})$.

Bandwidth [Hz]

 $Frequency\ range\ from\ DC\ to\ F-3dB\ where\ the\ variation\ of\ the\ frequency\ response\ is\ less\ than\ -3dB\ or\ -5\%\ for\ vibration\ sensors$

Resonant frequency nominal [kHz]

Typical value of the resonant frequency of the mounted system

Noise [$\mu V/\sqrt{Hz}$]

Undesired perturbations in the accelerometer output signal, which are generally uncorrelated with desired or anticipated input accelerations

Colibrys reserves the right to change these data without notice.









We are here for you. Addresses and Contacts

Sales Switzerland

Postcode 3000-9999 Liechtenstein

Postcode 1000-2999

Matthias Rüegg Ruhbergstrasse 32 CH-9230 Flawil

Raffael Favaretto Route d'Oron 124 CH-1673 Promasens

Phone + 41 44 877 35 18 Mobile+41 76 491 66 66 Fax +41 44 877 35 19 Phone + 41 44 877 35 22 Mobile+41 76 444 63 14 Fax +41 44 877 35 23

matthias.rueegg@pewatron.com

raffael.favaretto@pewatron.com

Sales Germany

Postcode 60000 - 79999

Phone + 49 719 149 60 58

Mobile + 49 163 762 74 30

Fax +49 719 193 31 88

Postcode 10000-59999

Postcode 80000-99999

Dieter Hirthe Mühlwea 23 D-71554 Weissach i.T. Neumarkter Str. 86a

Kurt Stritzelberger D-81673 Munich

Phone + 49 89 260 38 47 Mobile + 49 171 803 41 35 Fax + 49 89 43 10 91 91

dieter.hirthe@pewatron.com kurt.stritzelberger@pewatron.com **Key Accounts**

Aerospace and Defence

Claus Wübbena Vogelkamp 26 D-26655 Westerstede

Phone + 49 4488 5204 614 Mobile + 49 173 9700 691 Fax +49 4488 5204 616

claus.wuebbena@pewatron.com

Sales Austria

Kurt Stritzelberger Neumarkter Str. 86a D-81673 Munich

Phone + 49 89 260 38 47 Mobile + 49 17 18 03 41 35 Fax +49 89 43 10 91 91

kurt.stritzelberger@pewatron.com

Sales Other Countries / Product Management

Sensors

Physical Sensors Data Acquisition

Peter Felder

Phone + 41 44 877 35 05 peter.felder@pewatron.com

Geometrical Sensors

Eric Letsch

Phone + 41 44 877 35 14 eric.letsch@pewatron.com

Power Supplies

DC-DC Converters Switching Power Supplies **DC-AC Inverters**

Sebastiano Leggio Phone + 41 44 877 35 06

sebastiano.leggio@pewatron.com

E-Components

Current Sensors Man Machine Interface **Measurement Probes**

Sebastiano Leggio Phone + 41 44 877 35 06 sebastiano.leggio@pewatron.com **PEWATRON AG** Thurgauerstrasse 66 CH-8052 Zurich

Phone + 41 44 877 35 00 Fax +41 44 877 35 25

www.pewatron.com info@pewatron.com