




AAM 36 F CANOPEN

BLIND HOLLOW SHAFT MULTITURN ABSOLUTE ENCODER

MAIN FEATURES

Industry standard multiturn absolute encoder for factory automation applications.

- Magnetic sensor technology without contact (magnetic ASIC + Energy Harvesting)
- Sturdy construction thanks to separated chambers
- Power supply up to +32 VDC with CANopen interface
- Axial M12 connector output
- 10 mm blind hollow shaft
- Mounting by stator coupling



ORDERING CODE	AAM	36F	24 / 14	B	10/30	CNP	10	X	X	M12	A	.XXX
SERIES magnetic multiturn absolute encoder series AAM												
MODEL blind hollow shaft with stator coupling 36F												
MULTITURN RESOLUTION bit 24												
SINGLETURN RESOLUTION bit 14												
CODE TYPE binary B												
POWER SUPPLY 10 ... 30 V DC 10/30												
ELECTRICAL INTERFACE CANopen CNP												
BORE DIAMETER mm 10												
ENCLOSURE RATING IP67 cover side / IP 65 shaft side X												
OPTIONS to be reported X												
OUTPUT TYPE M12 5 pin connector M12												
DIRECTION TYPE axial A												
VARIANTE without mating connector 162												

PRELIMINARY

PRELIMINARY

ORDERING CODE	
Description	P/N
AAM 36F 24 / 14 B 10/30 CNP 10 X X M12 A . 162	92560002




© Copyright 2018 Eltra S.p.a. Unipersonale. All rights reserved. All informations in this catalog are subject to change without notice. Eltra takes no responsibility for typographic errors. For the terms of sales please check the website. REV.180605

30 1985-2015
eltra@eltra.it | www.eltra.it

MAGNETIC MULTITURN ABSOLUTE ENCODERS | AAM 36 F CANOPEN

AAM 36F

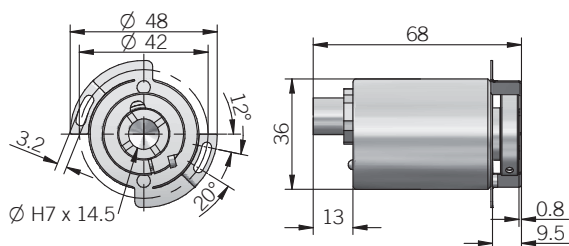

dimensions in mm

ELECTRICAL SPECIFICATIONS

Multiturn resolution	24 bit programmable during commissioning
Singleturn resolution	14 bit programmable during commissioning
Power supply	+10 ... 32 V DC (with reverse polarity protection)
Power draw without load	0,5 W
Electrical interface	CAN
Protocol	CANopen Communication profile CiA 301 Encoder profile CiA 406 V3.2 class C2
Node number	1 ... 127 (default 127) programmable during commissioning
Baud rate	10 kBaud ... 1 Mbaud with automatic bit rate detection
LSS protocol	according to CiA 305
CAN transmission modes	programmable (Synchronous and Asynchronous)
LED error messages	according to CiA 303-3
Code type	binary
Position update rate	≤ 600 μs
Start-up time	< 1,5 s
Accuracy	± 0,35°
Electromagnetic compatibility	according to 2014/30/EU directive
RoHS	according to 2011/65/EU directive

CONNECTIONS

Function	5 pin M12
+ V DC	2
0 V	3
CAN_H	4
CAN_L	5
CAN_GND (shield)	1
⊕	shield connected to encoder housing

MECHANICAL SPECIFICATION

Bore diameter	∅ 10 mm
Enclosure rating IEC 60529	IP 67 cover side / IP65 shaft side
Max rotation speed	6000 rpm
Max shaft load	80 N radial / 50 N axial
Shock	100 G, 6 ms (IEC 60068-2-27)
Vibrations	30 G, 10 ... 2000 Hz (IEC 60068-2-6)
Starting torque (at +20°C / +68°F)	< 0,002 Nm (0,28 Ozin)
Bearing stage material	aluminium
Shaft material	stainless steel
Housing material	chromium plated steel
Bearings	2 ball bearings
Bearings life	10 ⁹ revolutions
Operating temperature	-40° ... +85°C (-40° ... +185°F)
Storage temperature	-40° ... +100°C (-40° ... +212°F)
Weight	110 g (3,88 oz) approx

M12 connector(5 pin)
M12 A coded
solder side view FV



PRELIMINARY



© Copyright 2018 Eltra S.p.a. Unipersonale. All rights reserved. All informations in this catalog are subject to change without notice. Eltra takes no responsibility for typographic errors. For the terms of sales please check the website. REV.180605

3

30 1985-2015
eltra@eltra.it | www.eltra.it

Headquarter Switzerland:
Pewatron AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
info@pewatron.com

Office Germany:
Pewatron Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
info.de@pewatron.com



PEWATRON
SENSORS · POWER SOLUTIONS

We are here for you. Addresses and Contacts.

Sales Germany & Austria

**Geometrical sensors
Other products**

Kurt Stritzelberger
Phone +49 89 374 288 87 22
kurt.stritzelberger@pewatron.com

**Pressure sensors
Other products**

Gerhard Vetter
Phone +49 89 374 288 87 26
gerhard.vetter@pewatron.com

Gas sensors and modules

Peter Felder
Phone +41 44 877 35 05
peter.felder@pewatron.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei
Phone +41 44 877 35 18
basil.frei@pewatron.com

Postcode 1000 – 2999

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@pewatron.com

Sales International Key Accounts

Peter Felder
Phone +41 44 877 35 05
peter.felder@pewatron.com

Sales Other Countries / Product Management

**Pressure Sensors
Load Cells**

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@pewatron.com

**Gas sensors
Gas sensor modules**

Dr. Thomas Clausen
Phone +41 44 877 35 13
thomas.clausen@pewatron.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 89 374 288 87 67
adriano.pittarelli@pewatron.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@pewatron.com

**Linear position sensors
Angle sensors**

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@pewatron.com

**Accelerometers
Sensor elements**

Christoph Kleye
Phone +49 89 374 288 87 61
christoph.kleye@pewatron.com

Drive technology

CH Postcode 5000 – 9999 / DE

Roman Homa
Phone +41 76 444 00 86
roman.homa@pewatron.com

Drive technology

CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@pewatron.com

Harald Thomas

Phone +49 89 374 288 87 23
harald.thomas@pewatron.com