



## DOG2 MEMS SERIES VOLTAGE INCLINOMETER

### SPECIFICATIONS

- ◆ Dual axis inclinometer
- ◆ Measurement ranges  $\pm 25^\circ$ ,  $\pm 45^\circ$  and  $\pm 90^\circ$
- ◆ Voltage output

The **DOG2 MEMS-Series inclinometer** dual axis is mainly developed with focus on platform leveling, dynamic engine management, tip-over protection and tilt alarm.

A fast response time and good accuracy makes this device the ideal choice for mobile leveling applications. It features digital signal processing including temperature compensation.

The integrated filter improves performance and allows using the sensor in many noisy environments (e.g. vibrations).

The inclinometer includes a powerful digital signal processing that offers various filter algorithms and allows customer specific OEM solutions. It is possible to adjust the sensor to different environments yielding an optimized performance. Customization can also be made in terms of angular range and connectivity, i.e. cable and connector.

The PA6.6 housing is very compact in size and has compression limiter bushings for safe installation of the sensor. It is compatible with oil, grease and fuel also. Therefore it is frequently used for engine and vehicle applications.

### FEATURES


- ◆ 8 to 30 VDC supply voltage
- ◆ Digital signal processing includes
  - filter (e.g. vibration damping)
  - temperature compensation
- ◆ 12 bit resolution
- ◆ 100 Hz refresh rate
- ◆ -40 °C to 85 °C temperature range
- ◆ Accuracy typically
  - 0.5° | -40 °C to 85 °C
  - 0.15° | 25 °C

### APPLICATIONS

- ◆ Mobile and stationary cranes
- ◆ Lift platforms
- ◆ Building control
- ◆ Weighing systems
- ◆ Truck chassis leveling
- ◆ Vehicle applications
- ◆ Road construction machines

**DOG2 MEMS SERIES VOLTAGE INCLINOMETER**

**Dimensions [mm]**

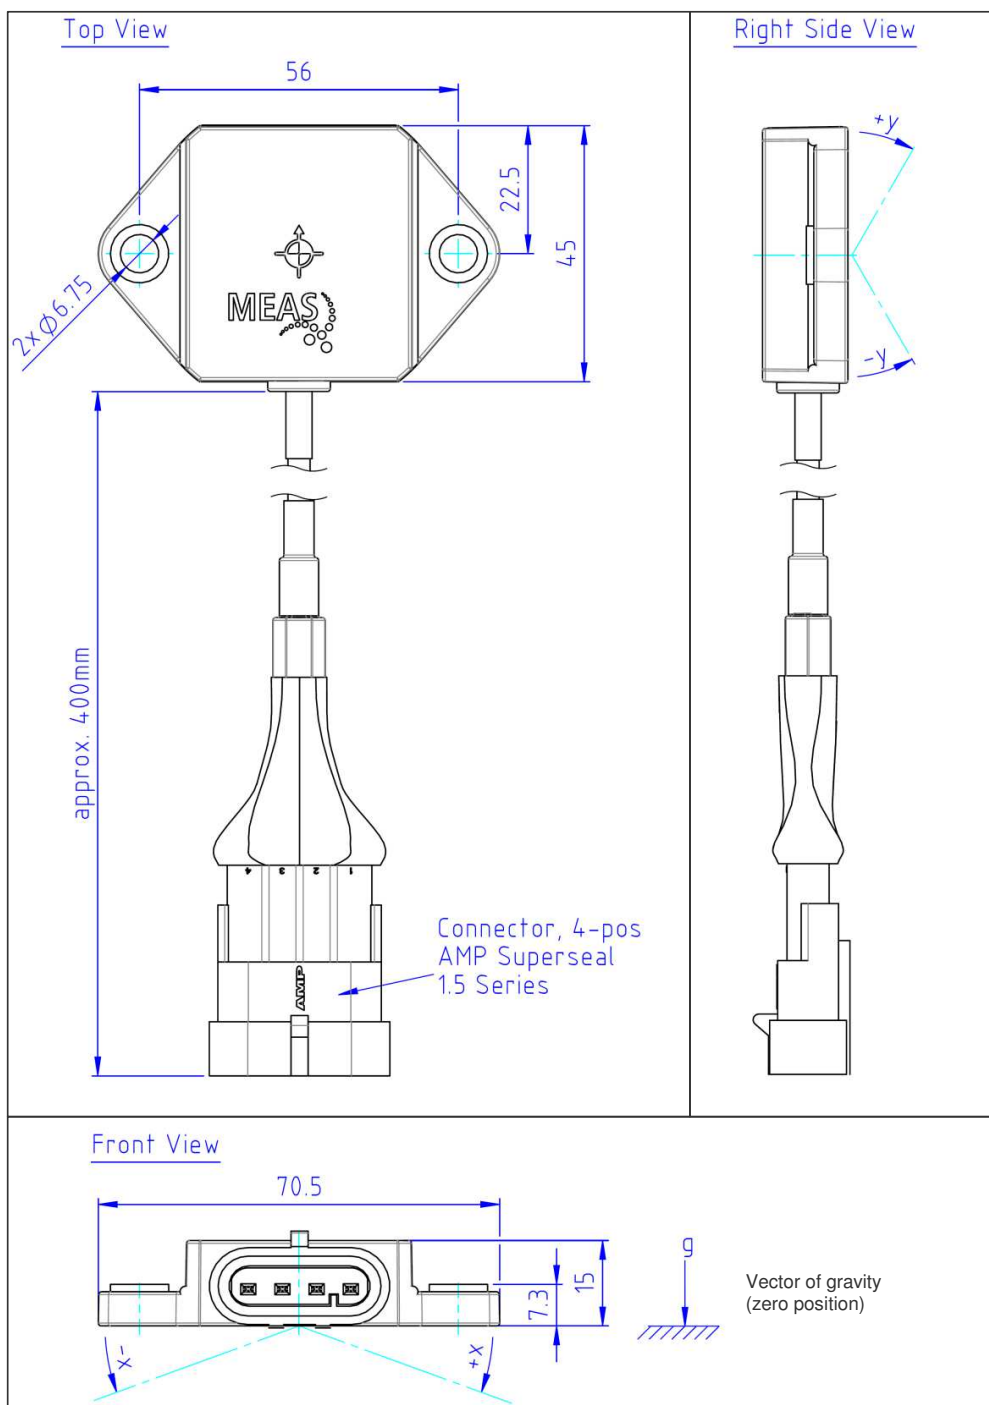


## DOG2 MEMS SERIES VOLTAGE INCLINOMETER

### PARAMETERS


Parameter	Value	Comment
Range	$\pm 25^\circ$ , $\pm 45^\circ$ or $\pm 90^\circ$	Dual axis sensor
Accuracy, typ.	0.5°	T= -40 °C to 85 °C
Accuracy, typ.	0.15°	T= 25 °C
Resolution	12 bit	
Refresh rate	100 Hz	Internal processing
Startup time	<1 s	Valid output signal
Supply/excitation voltage	8 to 30 V	Direct current (DC) stabilized
Supply current, typ.	15 mA	No load
Output	0.5 to 4.5 V	-25° to 25°, -45° to 45° or -90° to 90°
Connector	AMP Superseal 1.5-Series, 4-pos. cap housing, TE Connectivity part-no. 282106-1	Requires 4-pos. plug housing, AMP Superseal 1.5-Series at connecting harness, TE Connectivity part-no. 282088-1
Cable	4 wire 0.25 mm <sup>2</sup> , outer diameter Ø3.9 mm	PUR, length incl. connector 400 mm, full temperature range, flexible
Operation temperature range	-40 °C to 85 °C	
Storage temperature range	-40 °C to 85 °C	
Weight, typ.	60 g	
Dimensions	70.5 mm x 45 mm x 15 mm	W x D x H

### CONNECTOR PINNING

Pin	Function	Description
1	V <sub>CC</sub>	8 to 30 VDC supply input (+)
2	GND	GND
3	Output X	0.5 to 4.5 V, X axis output
4	Output Y	0.5 to 4.5 V, Y axis output



### TRANSFER CHARACTERISTIC

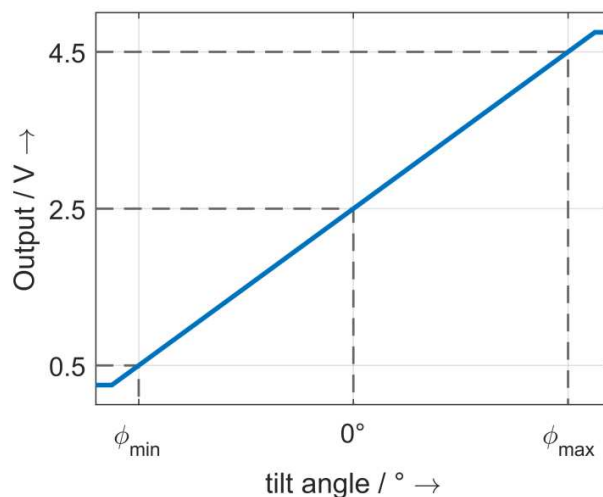


Part-No.	$\Phi_{\min}$	$\Phi_{\max}$
G-NSDOG2-001	-25°	25°
G-NSDOG2-002	-45°	45°
G-NSDOG2-003	-90°	90°

Linear transfer characteristic between  $\Phi_{\min}$  and  $\Phi_{\max}$

## DOG2 MEMS SERIES VOLTAGE INCLINOMETER

### FUNCTION VIEW

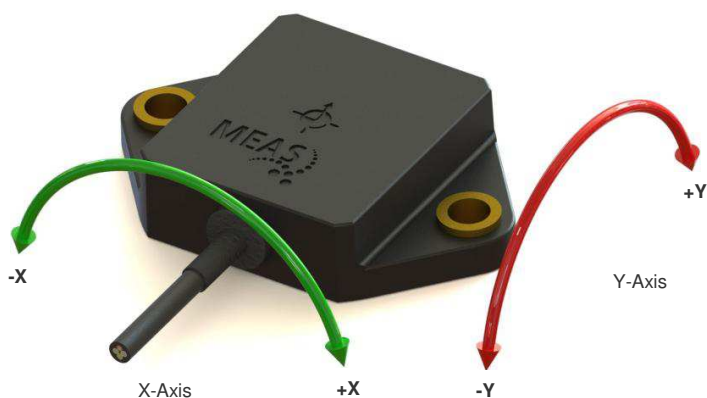

This DOG2 MEMS series voltage inclinometer is designed for floor mount application.

### ORDERING INFORMATION

PART NUMBER	NAME	DESCRIPTION
G-NSDOG2-001	25DOG2 MEMS SERIES VOLTAGE	Dual axis inclinometer, floor mount, range $\pm 25^\circ$ , supply 8 to 30 VDC, output voltage 0.5 to 4.5 V
G-NSDOG2-002	45DOG2 MEMS SERIES VOLTAGE	Dual axis inclinometer, floor mount, range $\pm 45^\circ$ , supply 8 to 30 VDC, output voltage 0.5 to 4.5 V
G-NSDOG2-003	45DOG2 MEMS SERIES VOLTAGE	Dual axis inclinometer, floor mount, range $\pm 90^\circ$ , supply 8 to 30 VDC, output voltage 0.5 to 4.5 V

For other orientations, measurement ranges or supply voltages please contact TE Connectivity sales representatives.

#### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

Headquarter Switzerland:  
Pewatron AG  
Thurgauerstrasse 66  
CH-8050 Zurich  
Phone +41 44 877 35 00  
info@pewatron.com

Office Germany:  
Pewatron Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim  
Phone +49 89 374 288 87-0  
info.de@pewatron.com



**PEWATRON**  
SENSORS · POWER SOLUTIONS

## We are here for you. Addresses and Contacts.

---

### Sales Germany & Austria

Postcode 00000 – 31999  
Postcode 38000 – 39999  
Postcode 80000 – 99999  
Austria

Kurt Stritzelberger

Phone +49 89 260 52 80  
Mobile +49 171 803 41 35

kurt.stritzelberger@pewatron.com

Postcode 32000 – 37999  
Postcode 40000 – 79999

Gerhard Vetter

Phone +49 674 394 75 75  
Mobile +49 163 762 74 30

gerhard.vetter@pewatron.com

**Geometrical sensors**  
**Sensor elements**

Thorsten Ravagni

Phone +49 60 479 53 627

thorsten.ravagni@pewatron.com

---

### Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei

Phone +41 44 877 35 18  
Mobile +41 76 279 37 26

basil.frei@pewatron.com

Postcode 1000 – 2999

Christian Mohrenstecher

Mobile +41 76 444 57 93

christian.mohrenstecher@pewatron.com

### Sales International Key Accounts

Peter Felder

Phone +41 44 877 35 05  
Mobile +41 79 406 49 83

peter.felder@pewatron.com

---

### Sales Other Countries / Product Management

#### Pressure Sensors

Philipp Kistler  
Phone +41 44 877 35 03  
philipp.kistler@pewatron.com

#### Accelerometers / Level Flow sensor elements

Thorsten Ravagni  
Phone +49 60 479 53 627  
thorsten.ravagni@pewatron.com

#### Drive technology CH Postcode 5000 – 9999 / DE

Roman Homa  
Mobile +41 76 444 00 86  
roman.homa@pewatron.com

#### Gas sensors / Gas sensor modules Load cells

Dr. Thomas Clausen  
Phone +41 44 877 35 13  
thomas.clausen@pewatron.com

#### Power supplies

Sebastiano Leggio  
Phone +41 44 877 35 06  
sebastiano.leggio@pewatron.com

#### Drive technology CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher  
Mobile +41 76 444 57 93  
christian.mohrenstecher@pewatron.com

#### Flow / Level / Medical products

Dr. Adriano Pittarelli  
Phone +49 8245 774 95 44  
adriano.pittarelli@pewatron.com

#### Linear position sensors Angle sensors

Eric Letsch  
Phone +41 44 877 35 14  
eric.letsch@pewatron.com

#### Current sensors Power solutions

Osman Coban  
Phone +49 71 635 363 898  
osman.coban@pewatron.com