

Model 606M1 Accelerometer

Seat Pad Accelerometer
MEMS, Triaxial Sensors
DC Response
Accurate Temp Compensation
ISO 10326-1 Configuration



The Model 606M1 is a MEMS triaxial seat pad accelerometer with both static and dynamic responses designed specially for characterizing whole body vibration in accordance with ISO 2631-1 and ISO 8041. The DC response of the silicon MEMS sensors is the key to yield accurate velocity and displacement results from the raw acceleration data. The 606M1 incorporates integral temperature compensation that provides a stable output over a wide operating range. The on-board voltage regulation circuit works with power supply from 8 to 32Vdc.


FEATURES

- Three Independent Circuits
- Low Current Consumption
- Ranges: $\pm 25g$
- Gas Damped, DC Response
- High Over-Range Protection
- Temperature Compensation
- Low Transverse Sensitivity

APPLICATIONS

- Whole Body Vibration Study
- Vibration/Shock Monitoring
- Helicopter Flight Testing
- Heavy Equipment Testing
- Biodynamic Study

dimensions

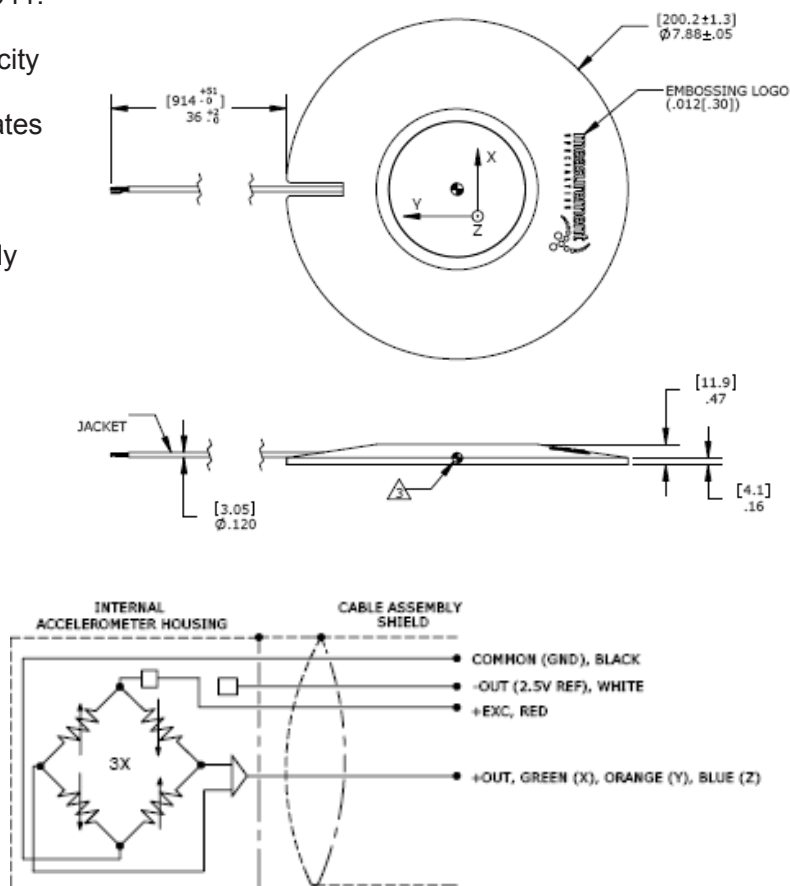

Model 606M1 Accelerometer

performance specifications

All values are typical at +24°C, 100Hz and 12Vdc excitation unless otherwise stated.
Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters		Notes
DYNAMIC		
Range (g)	±25	
Sensitivity (mV/g)	80	
Frequency Response (Hz)	0-800	±5%
Frequency Response (Hz)	0-1000	±1dB
Natural Frequency (Hz)	4000	
Non-Linearity (%FSO)	±1.0	
Transverse Sensitivity (%)	<3	<1 Typical
Damping Ratio	0.7	
Shock Limit (g)	5000	
ELECTRICAL		
Zero Acceleration Output (mV)	±50	Differential
Excitation Voltage (Vdc)	8 to 36	
Excitation Current (mA)	<15	
Bias Voltage (Vdc)	2.5	
Output Resistance (Ω)	<100	
Insulation Resistance (MΩ)	>100	@100Vdc
Turn On Time (msec)	<100	
Residual Noise (μV RMS)	800	Passband
Ground Isolation	Isolated from Mounting Surface	
ENVIRONMENTAL		
Thermal Zero Shift (%FSO)	±3	Typical
Thermal Sensitivity Shift (%)	±3.5	Typical
Operating Temperature (°C)	-20 to 85	
Compensated Temperature (°C)	-20 to 85	
Storage Temperature (°C)	-20 to 85	
PHYSICAL		
Case Material (Seat Pad)	Nitrile Rubber	
Cable	Teflon Insulated Leads, Braided Shield, TPE Jacket	
Weight (grams)	380	
Mounting	2x #4 or M3 Screws	
Mounting	Adhesive Tape	
AWG	#28, 6X	
Wiring color code:	X-axis: +Excitation = Red; +Output = Green; -Output (-2.5V Ref) = White; Common (Ground) = Black	
	Y-axis: +Excitation = Red; +Output = Orange; -Output (-2.5V Ref) = White; Common (Ground) = Black	
	Z-axis: +Excitation = Red; +Output = Blue; -Output (-2.5V Ref) = White; Common (Ground) = Black	
Calibration supplied:	CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to ±5% Frequency Response Limit	
Optional accessories:	101 Three Channel DC Signal Conditioner Amplifier	
Part Numbering:	Model Number	
Model Number:	606M1	

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

Headquarter Switzerland:
Pewatron AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
info@pewatron.com

Office Germany:
Pewatron Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87-0
info.de@pewatron.com



PEWATRON
SENSORS · POWER SOLUTIONS

We are here for you. Addresses and Contacts.

Sales Germany & Austria

Postcode 00000 – 31999
Postcode 38000 – 39999
Postcode 80000 – 99999
Austria

Kurt Stritzelberger

Phone +49 89 260 52 80
Mobile +49 171 803 41 35

kurt.stritzelberger@pewatron.com

Postcode 32000 – 37999
Postcode 40000 – 79999

Gerhard Vetter

Phone +49 674 394 75 75
Mobile +49 163 762 74 30

gerhard.vetter@pewatron.com

Geometrical sensors
Sensor elements

Thorsten Ravagni

Phone +49 60 479 53 627

thorsten.ravagni@pewatron.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei

Phone +41 44 877 35 18
Mobile +41 76 279 37 26

basil.frei@pewatron.com

Postcode 1000 – 2999

Christian Mohrenstecher

Mobile +41 76 444 57 93

christian.mohrenstecher@pewatron.com

Sales International Key Accounts

Peter Felder

Phone +41 44 877 35 05
Mobile +41 79 406 49 83

peter.felder@pewatron.com

Sales Other Countries / Product Management

Pressure Sensors

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@pewatron.com

Accelerometers / Level Flow sensor elements

Thorsten Ravagni
Phone +49 60 479 53 627
thorsten.ravagni@pewatron.com

Drive technology CH Postcode 5000 – 9999 / DE

Roman Homa
Mobile +41 76 444 00 86
roman.homa@pewatron.com

Gas sensors / Gas sensor modules Load cells

Dr. Thomas Clausen
Phone +41 44 877 35 13
thomas.clausen@pewatron.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@pewatron.com

Drive technology CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Mobile +41 76 444 57 93
christian.mohrenstecher@pewatron.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 8245 774 95 44
adriano.pittarelli@pewatron.com

Linear position sensors Angle sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@pewatron.com

Current sensors Power solutions

Osman Coban
Phone +49 71 635 363 898
osman.coban@pewatron.com