




# MODEL 3052A ACCELEROMETER




## SPECIFICATIONS

- ◆ Piezoresistive MEMS
- ◆ DC Response, Gas Damped
- ◆ Circuit Board Mountable
- ◆ Integral Temp Compensation

The Model 3052A is a silicon MEMS accelerometer with integral temperature compensation. The accelerometer is packaged on a ceramic substrate with an epoxy sealed ceramic cover and is designed for adhesive mounting. The accelerometer is offered in ranges from  $\pm 2g$  to  $\pm 100g$  range and provides a flat frequency response to minimum 1500Hz. The silicon MEMS sensor is gas damped and incorporates over-range stops for high-g shock protection.

For a similar accelerometer designed for bolt mounting, see the model 3058A

## dimensions

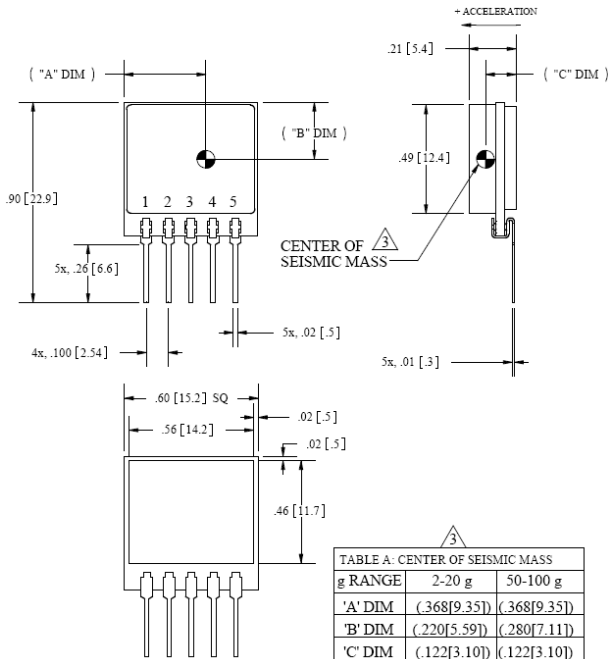


## FEATURES

- ◆ Adhesive Mounted
- ◆  $\pm 1.0\%$  Non-Linearity
- ◆ 0 to  $+50^{\circ}C$  Temp Compensation
- ◆ Built-in Over-range Stops
- ◆ Low Power Consumption

## APPLICATIONS

- ◆ Vibration & Shock Monitoring
- ◆ Motion Control
- ◆ Impact & Shock Testing
- ◆ Transportation Measurements
- ◆ Embedded Applications
- ◆ Machinery

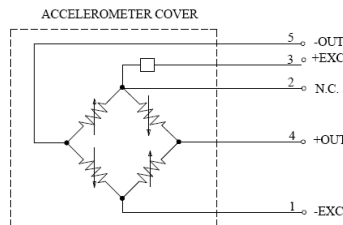

**MODEL 3052 ACCELEROMETER****PERFORMANCE SPECIFICATIONS**

All values are typical at +24°C, 80Hz and 5Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

Parameters							Notes
<b>DYNAMIC</b>							
Range (g)	±2	±5	±10	±20	±50	±100	
Sensitivity (mV/g) <sup>1</sup>	8.0-16.0	4.8-7.2	2.4-3.6	1.2-1.8	0.48-0.72	0.24-0.36	@5Vdc Excitation
Frequency Response (Hz)	0-150	0-250	0-350	0-550	0-1000	0-1300	±5%
Natural Frequency (Hz)	700	800	1000	1500	4000	6000	
Non-Linearity (%FSO)	±1.0	±1.0	±1.0	±1.0	±1.0	±1.0	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1 Typical
Damping Ratio	0.7	0.7	0.7	0.7	0.6	0.5	
Shock Limit (g)	3000	3000	3000	3000	5000	5000	
<b>ELECTRICAL</b>							
Zero Acceleration Output (mV)	±2						Differential
Excitation Voltage (Vdc)	2.7 to 12						
Input Impedance (Ω)	1200-6500						
Output Impedance (Ω)	1200-6500						
Insulation Resistance (MΩ)	>100						@50Vdc
Residual Noise (µV RMS)	10						Maximum
Ground Isolation	Isolated from Mounting Surface						
<b>ENVIRONMENTAL</b>							
Thermal Zero Shift (%FSO/°C)	±0.060						0 to +50°C
Thermal Sensitivity Shift (%/°C)	±0.060						0 to +50°C
Operating Temperature (°C)	-40 to +125						
Compensated Temperature (°C)	0 to +50						
Storage Temperature (°C)	-40 to +125						
Humidity	Epoxy Sealed, IP61						
<b>PHYSICAL</b>							
Case Material	Ceramic						
Weight (grams)	3.1						
Mounting	Adhesive or solder						

<sup>1</sup> Output is ratiometric to excitation voltage

<b>Calibration supplied:</b>	CS-SENS-0100	NIST Traceable Amplitude Calibration at 100Hz
<b>Optional accessories:</b>	121	Three Channel DC Signal Conditioner Amplifier
	140A	Auto-Zero Inline Amplifier

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

## MODEL 3052 ACCELEROMETER

### ORDERING INFO

PART NUMBERING Model Number+Range+Electrical Connection

3052A-GGG-P

I | I \_\_\_\_\_ Electrical Connection (P=pins)  
I \_\_\_\_\_ Range (010 is 10g)

Example: 3052A-010-P

Model 3052A, 10g, Pins

#### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

Headquarter Switzerland:  
Pewatron AG  
Thurgauerstrasse 66  
CH-8050 Zurich  
Phone +41 44 877 35 00  
info@pewatron.com

Office Germany:  
Pewatron Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim  
Phone +49 89 374 288 87-0  
info.de@pewatron.com



**PEWATRON**  
SENSORS · POWER SOLUTIONS

## We are here for you. Addresses and Contacts.

---

### Sales Germany & Austria

Postcode 00000 – 31999  
Postcode 38000 – 39999  
Postcode 80000 – 99999  
Austria

Kurt Stritzelberger

Phone +49 89 260 52 80  
Mobile +49 171 803 41 35

kurt.stritzelberger@pewatron.com

Postcode 32000 – 37999  
Postcode 40000 – 79999

Gerhard Vetter

Phone +49 674 394 75 75  
Mobile +49 163 762 74 30

gerhard.vetter@pewatron.com

**Geometrical sensors**  
**Sensor elements**

Thorsten Ravagni

Phone +49 60 479 53 627

thorsten.ravagni@pewatron.com

---

### Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei

Phone +41 44 877 35 18  
Mobile +41 76 279 37 26

basil.frei@pewatron.com

Postcode 1000 – 2999

Christian Mohrenstecher

Mobile +41 76 444 57 93

christian.mohrenstecher@pewatron.com

### Sales International Key Accounts

Peter Felder

Phone +41 44 877 35 05  
Mobile +41 79 406 49 83

peter.felder@pewatron.com

---

### Sales Other Countries / Product Management

#### Pressure Sensors

Philipp Kistler  
Phone +41 44 877 35 03  
philipp.kistler@pewatron.com

#### Accelerometers / Level Flow sensor elements

Thorsten Ravagni  
Phone +49 60 479 53 627  
thorsten.ravagni@pewatron.com

#### Drive technology CH Postcode 5000 – 9999 / DE

Roman Homa  
Mobile +41 76 444 00 86  
roman.homa@pewatron.com

#### Gas sensors / Gas sensor modules Load cells

Dr. Thomas Clausen  
Phone +41 44 877 35 13  
thomas.clausen@pewatron.com

#### Power supplies

Sebastiano Leggio  
Phone +41 44 877 35 06  
sebastiano.leggio@pewatron.com

#### Drive technology CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher  
Mobile +41 76 444 57 93  
christian.mohrenstecher@pewatron.com

#### Flow / Level / Medical products

Dr. Adriano Pittarelli  
Phone +49 8245 774 95 44  
adriano.pittarelli@pewatron.com

#### Linear position sensors Angle sensors

Eric Letsch  
Phone +41 44 877 35 14  
eric.letsch@pewatron.com

#### Current sensors Power solutions

Osman Coban  
Phone +49 71 635 363 898  
osman.coban@pewatron.com