

CMS300

Angular Rate and Dual-Axis Linear Acceleration Combi-Sensor

CMS300



Actual size

CMS390




Actual size

Key features

- Small (CMS300: 10.4 x 6.0 x 2.2mm
CMS390: 10.4 x 6.7 x 2.7mm)
- Proven and robust silicon MEMS vibrating ring gyro and dual-axis accelerometer
- Excellent bias over temperature (1.75°/s, 30mg)
- Flat and orthogonal mounting options (CMS300 and CMS390)
- User selectable dynamic ranges (150°/s, 300°/s, 2.5g and 10g)
- Digital (SPI®) output mode
- User selectable bandwidth (Rate; 45, 55, 90 or 110Hz
Acc; 45, 62, 95 or 190Hz)
- Range and bandwidth independently selectable for each axis
- Low power consumption (8mA) from 3.3V supply
- High shock and vibration rejection
- Temperature range -40 +125°C
- Hermetically sealed ceramic LCC surface mount package for temperature and humidity resistance
- Integral temperature sensor
- RoHS compliant
- AEC Q100 tested

Typical applications

- Measurement and control
- Navigation and personal navigation
- Inertial Measurement Units
- Inclinometer/tilt sensors
- Low cost AHRS and attitude measurement
- Levelling
- Robotics

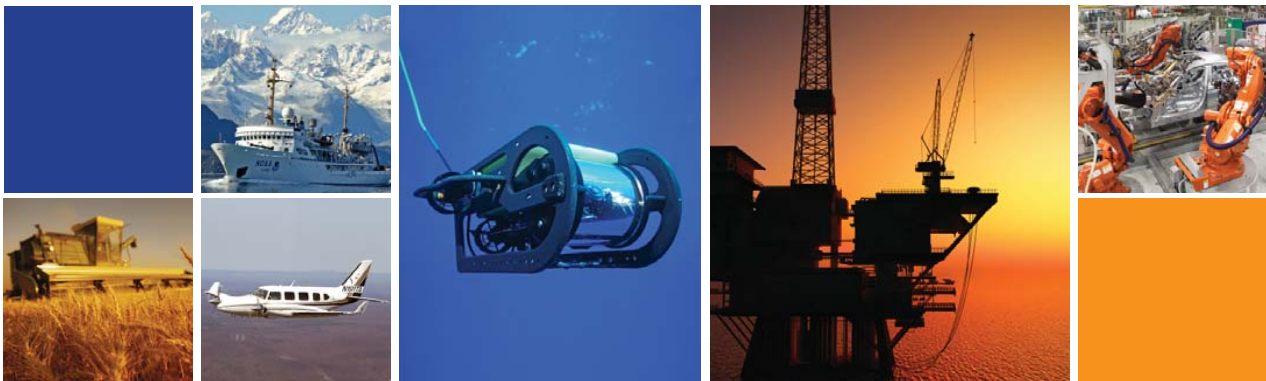

© Silicon Sensing is an Atlantic Inertial Systems, Sumitomo Precision Products joint venture company

CMS300


Angular Rate and Dual-Axis Linear Acceleration Combi-Sensor



For full technical datasheets please go to our website where the documents can be downloaded



CMS300

All dimensions in millimetres

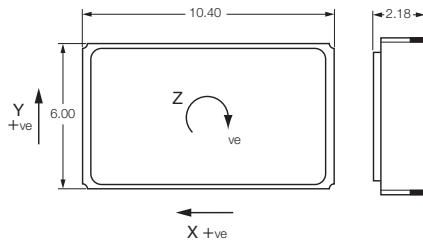


CMS390

All dimensions in millimetres

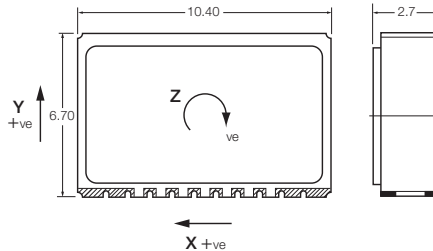

CMS300 Evaluation Board -
(P/N CMS300-EVB)



CMS390 Evaluation Board -
(P/N CMS390-EVB)

Typical Data

Parameter	Typical
Ordering Part Number	CMS300, CMS390
Number of sense axes	Single axis angular rate (Z) and 2-axis linear acceleration (X, Y)
Angular Rate Channel	
Dynamic range	$\pm 150^\circ/\text{s}$, $\pm 300^\circ/\text{s}$ (set by user via SPI [®])
Scale factor	204.8 lbs ² /s ($\pm 150^\circ/\text{s}$), 102.4 lbs ² /s ($\pm 300^\circ/\text{s}$)
Resolution	0.005 [°] /s (150 [°] /s), 0.01 [°] /s (300 [°] /s)
SF over temperature	< $\pm 1\%$
SF non-linearity	< $\pm 0.15^\circ/\text{s}$ (150 [°] /s), < $\pm 0.30^\circ/\text{s}$ (300 [°] /s)
Bias over temperature (-40°C to +125°C)	$\pm 1.0^\circ/\text{s}$
Bandwidth (-3dB)	45Hz, 55Hz, 90Hz, 110Hz (independently set by user via SPI [®])
Noise (RMS in 45Hz)	0.06 [°] /s
Linear Acceleration Channels	
Dynamic range	$\pm 2.5\text{g}$, $\pm 10\text{g}$ (each axis independently set by user via SPI [®])
Scale factor	12,800 lsb/g ($\pm 2.5\text{g}$) 3,200 lsb/g ($\pm 10\text{g}$)
Resolution	0.079mg (2.5g), 0.313mg (10g)
SF over temperature	$\pm 1\%$
SF non-linearity	< $\pm 3\text{mg}$ (2.5g), < $\pm 5\text{mg}$ (10g)
Bias over temperature (-40°C to +125°C)	$\pm 20\text{mg}$ (2.5g), $\pm 50\text{mg}$ (10g)
Bandwidth (-3dB)	45Hz, 62Hz, 95Hz, 190Hz (independently set by user via SPI [®])
Noise (RMS in 45Hz)	1mg
General	
Temperature	-40°C to +125°C (operating), -55°C to +150°C (storage)
Shock	95g 6ms ½ sine (operating), 10,000g 0.5ms ½ sine (unpowered)
Vibration	8.85g rms 10Hz - 5kHz
Start-up time	150ms
Supply voltage	3.15V to 3.45V
Current consumption	8mA
Mass	0.4g (CMS300) 0.6g (CMS390)

Silicon Sensing Systems Limited Registered in England & Wales No. 3635234 Clittaford Road, Southway, Plymouth, Devon PL6 6DE
The device mark Silicon Sensing is a registered trade mark of Silicon Sensing Systems Community Trade Mark 003587664

Specification subject to change without notice.

© Copyright 2015
Silicon Sensing Systems Limited
All rights reserved. Printed in England 07/15

CMS300-00-0100-131 Rev 4
DCR No. 710009302

Headquarter Switzerland:
Pewatron AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
info@pewatron.com

Office Germany:
Pewatron Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87-0
info.de@pewatron.com



PEWATRON
SENSORS · POWER SOLUTIONS

We are here for you. Addresses and Contacts.

Sales Germany & Austria

Postcode 00000 – 31999
Postcode 38000 – 39999
Postcode 80000 – 99999
Austria

Kurt Stritzelberger

Phone +49 89 260 52 80
Mobile +49 171 803 41 35

kurt.stritzelberger@pewatron.com

Postcode 32000 – 37999
Postcode 40000 – 79999

Gerhard Vetter

Phone +49 674 394 75 75
Mobile +49 163 762 74 30

gerhard.vetter@pewatron.com

Geometrical sensors
Sensor elements

Thorsten Ravagni

Phone +49 60 479 53 627

thorsten.ravagni@pewatron.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei

Phone +41 44 877 35 18
Mobile +41 76 279 37 26

basil.frei@pewatron.com

Postcode 1000 – 2999

Christian Mohrenstecher

Mobile +41 76 444 57 93

christian.mohrenstecher@pewatron.com

Sales International Key Accounts

Peter Felder

Phone +41 44 877 35 05
Mobile +41 79 406 49 83

peter.felder@pewatron.com

Sales Other Countries / Product Management

Pressure Sensors

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@pewatron.com

Accelerometers / Level Flow sensor elements

Thorsten Ravagni
Phone +49 60 479 53 627
thorsten.ravagni@pewatron.com

Drive technology CH Postcode 5000 – 9999 / DE

Roman Homa
Mobile +41 76 444 00 86
roman.homa@pewatron.com

Gas sensors / Gas sensor modules Load cells

Dr. Thomas Clausen
Phone +41 44 877 35 13
thomas.clausen@pewatron.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@pewatron.com

Drive technology CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Mobile +41 76 444 57 93
christian.mohrenstecher@pewatron.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 8245 774 95 44
adriano.pittarelli@pewatron.com

Linear position sensors Angle sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@pewatron.com

Current sensors Power solutions

Osman Coban
Phone +49 71 635 363 898
osman.coban@pewatron.com