

PINPOINT®

SILICON SENSING®

Precision Navigation and Pointing Gyroscope

CRM100/102



Actual size

CRM200/202




Actual size

Key features

- Small (5.7 x 4.8 x 1.2 - CRM100/102
6.3 x 5.5 x 2.7 - CRM200/202)
- Proven and robust silicon MEMS vibrating ring gyro
- Class-leading bias and noise over temperature for precision navigation and pointing
- In-plane and orthogonal sensing options (part numbers CRM100 and CRM200)
- User selectable dynamic ranges
- Higher rate variants available (CRM102/202)
- User adjustable bandwidth (to 160Hz)
- Analogue and digital (SPI®) outputs
- 3V nominal supply (2.7 - 3.6V range)
- Low power consumption (4mA)
- High shock and vibration rejection
- Hermetically sealed ceramic LCC surface mount package for temperature and humidity resistance
- Integral temperature sensor
- Low integration cost
- Evaluation boards available
- RoHS compliant
- AEC Q100/200 tested

Typical applications

- Automotive in-car navigation
- GPS vehicle and personal navigation aiding
- Vehicle yaw, pitch and roll rate sensing
- Motion control
- Pointing devices
- Precision agriculture
- Antenna stabilisation
- Industrial and robotics

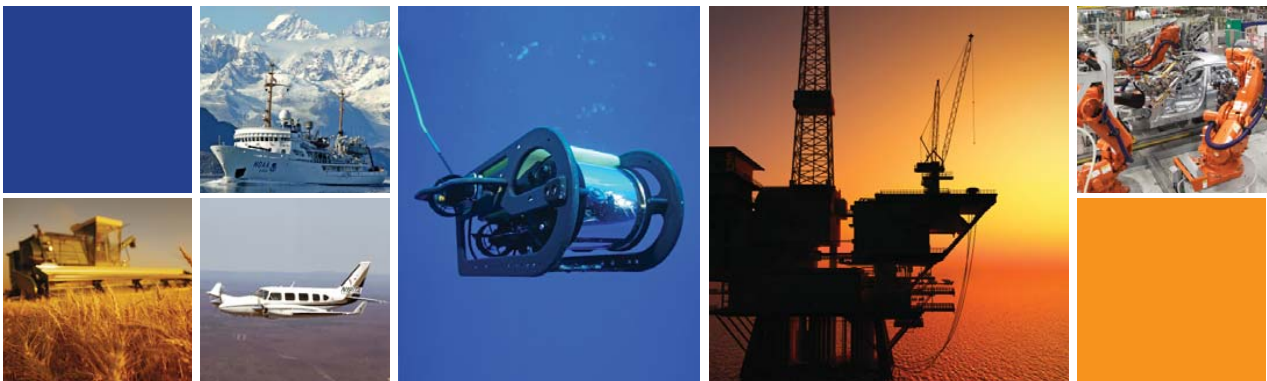

© Silicon Sensing is an Atlantic Inertial Systems, Sumitomo Precision Products joint venture company




Precision Navigation and Pointing Gyroscope

For full technical datasheets please go to our website where the documents can be downloaded




CRM100/102

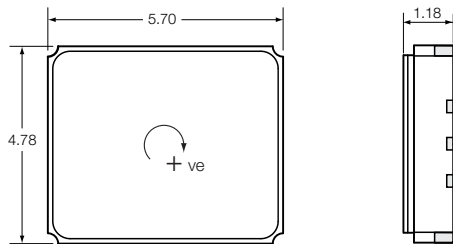

All dimensions in millimetres

CRM200/202

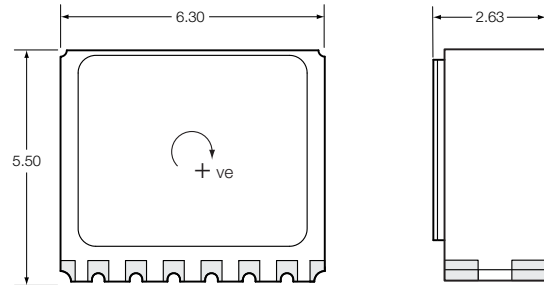


All dimensions in millimetres

Typical Data

Part Number	CRM100	CRM102
	CRM200	CRM202
Supply voltage (Vdd)	2.7V ~ 3.6V	
Dynamic range	75°/s, 150°/s, 300°/s, 900°/s (set by using PCBA connection)	225°/s, 450°/s, 900°/s, 2,700°/s (set by using PCBA connection)
Scale factor (analogue output - ratiometric)	12mV/°/s, 6.0mV/°/s, 3.0mV/°/s, 1.0mV/°/s	1mV/°/s (Vdd = 3V, 900°/s range)
SF over temperature	±0.5%	±1%
Null	½ xVdd	
Bias over temperature	±1.0°/s	±12°/s
Bias instability	12°/hr	20°/hr
Bandwidth (-3dB)	Up to 160Hz (set by customer using an external capacitor)	
Noise spectral density	0.018°/s/rt Hz	0.05°/s/rt Hz
Angular Random Walk	0.2°/rt hr	0.8°/rt hr
Temperature (full performance)	-40°C to +85°C	-20°C to +85°C
Temperature (reduced performance)	-40°C to +105°C	N/A
Temperature (storage)	-60°C to +125°C	-20°C to +125°C
Shock	3,500g 500µs (unpowered) 500g 1ms ½ sine (powered) 100g 6ms (powered)	
Vibration	12g rms 10 - 5kHz (powered)	
Start-up-time	<0.3s	
Mass	0.1 gram	
Current consumption	4mA	

Allan Variance

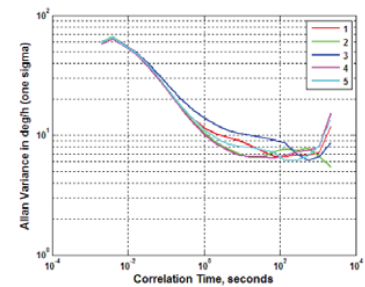

Specification subject to change without notice.

© Copyright 2015
Silicon Sensing Systems Limited
All rights reserved. Printed in England 07/15

CRM100-00-0100-131 Rev 10
DCR No. 710009295

Silicon Sensing Systems Limited Registered in England & Wales No. 3635234 Clifton Road, Southway, Plymouth, Devon PL6 6DE
The device mark Silicon Sensing is a registered trade mark of Silicon Sensing Systems Community Trade Mark 003587664

Headquarter Switzerland:
Pewatron AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
info@pewatron.com

Office Germany:
Pewatron Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
info.de@pewatron.com



PEWATRON
SENSORS · POWER SOLUTIONS

We are here for you. Addresses and Contacts.

Sales Germany & Austria

Geometrical sensors Other products

Kurt Stritzelberger
Phone +49 89 374 288 87 22
kurt.stritzelberger@pewatron.com

Pressure sensors Other products

Gerhard Vetter
Phone +49 89 374 288 87 26
gerhard.vetter@pewatron.com

Gas sensors and modules

Peter Felder
Phone +41 44 877 35 05
peter.felder@pewatron.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei
Phone +41 44 877 35 18
basil.frei@pewatron.com

Postcode 1000 – 2999

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@pewatron.com

Sales International Key Accounts

Peter Felder
Phone +41 44 877 35 05
peter.felder@pewatron.com

Sales Other Countries / Product Management

Pressure Sensors Load Cells

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@pewatron.com

Gas sensors Gas sensor modules

Dr. Thomas Clausen
Phone +41 44 877 35 13
thomas.clausen@pewatron.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 89 374 288 87 67
adriano.pittarelli@pewatron.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@pewatron.com

Linear position sensors Angle sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@pewatron.com

Accelerometers Sensor elements

Christoph Kleye
Phone +49 89 374 288 87 61
christoph.kleye@pewatron.com

Drive technology

CH Postcode 5000 – 9999 / DE

Roman Homa
Phone +41 76 444 00 86
roman.homa@pewatron.com

Drive technology

CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@pewatron.com

Harald Thomas

Phone +49 89 374 288 87 23
harald.thomas@pewatron.com