



16.8 ~ 30W Power Adaptor with Charging Function

GC30B series



■ Features :

- Charger for lead-acid batteries (flooded, Gel and AGM) and li-ion batteries (lithium iron and lithium manganese) (Note.1)
- Universal AC input / Full range
- 2 pole AC Inlet IEC320-C8
- Class II power (without earth pin)
- No load power consumption <1.0W
- Constant current and voltage(CC,CV mode)
- Suitable for continue load
- For high surge current equipment
- Protections: Short circuit / Overload / Over voltage / Over temp.
- 2 colors LED indicate for charging status
- Fully enclosed plastic case
- High reliability
- Approvals: UL / CUL / TUV / CB / FCC / CE
- 2 years warranty



SPECIFICATION

| ORDER NO. | GC30B-0P1J | GC30B-1P1J | GC30B-11P1J | GC30B-2P1J | GC30B-4P1J | GC30B-5P1J | GC30B-6P1J | |
|---------------------------|--|---|-------------|------------|------------|--------------|------------|--------------|
| OUTPUT | SAFETY MODEL NO. | GC30B-0 | GC30B-1 | GC30B-11 | GC30B-2 | GC30B-4 | GC30B-5 | GC30B-6 |
| | DC VOLTAGE SET AT <small>Note.3</small> | 4.2V | 5.6V | 7.2V | 8.4V | 14.3V | 16.8V | 28.6V |
| | RATED CURRENT | 4A | 3.99A | 3A | 3A | 2.09A | 1.6A | 1.04A |
| | CURRENT RANGE | 0 ~ 4A | 0 ~ 3.99A | 0 ~ 3A | 0 ~ 3A | 0 ~ 2.09A | 0 ~ 1.6A | 0 ~ 1.04A |
| | RATED POWER | 16.8W | 22.38W | 21.6W | 25.2W | 30W | 27W | 30W |
| | RIPPLE & NOISE (max.) <small>Note.4</small> | 50mVp-p | 50mVp-p | 80mVp-p | 80mVp-p | 100mVp-p | 100mVp-p | 150mVp-p |
| | CHARGING VOLTAGE RANGE <small>Note.5</small> | 3.6 ~ 4.4V | 5 ~ 5.8V | 6.5 ~ 7.5V | 7.7 ~ 8.6V | 13.5 ~ 14.5V | 16 ~ 17V | 27.1 ~ 28.8V |
| | LINE REGULATION <small>Note.6</small> | ±1.0% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% |
| | LED INDICATOR | Green LED ON <150 ~ 200mA < Red LED ON | | | | | | |
| SETUP, RISE, HOLD UP TIME | 200ms, 50ms, 16ms at full load | | | | | | | |
| INPUT | VOLTAGE RANGE | 90 ~ 264VAC 127 ~ 370VDC | | | | | | |
| | FREQUENCY RANGE | 47 ~ 63Hz | | | | | | |
| | EFFICIENCY (Typ.) | 55% | 70% | 74% | 76% | 78% | 78% | 80% |
| | AC CURRENT | 1A / 100VAC | | | | | | |
| | INRUSH CURRENT (max.) | 40A / 230VAC | | | | | | |
| | LEAKAGE CURRENT(max.) | 0.25mA / 240VAC | | | | | | |
| PROTECTION | OVERLOAD | 90 ~ 110% Constant current mode and over 300% pulsing mode Protection type : Constant current limiting, recovers automatically after fault condition is removed | | | | | | |
| | OVER VOLTAGE | 110 ~ 135% rated output voltage Protection type : Clamp by zener diode | | | | | | |
| | OVER TEMPERATURE | IC1Tj130°C Protection type : Shut down o/p voltage, recovers automatically after temperature goes down | | | | | | |
| ENVIRONMENT | WORKING TEMP. | 0 ~ +50°C (Refer to output load derating curve) | | | | | | |
| | WORKING HUMIDITY | 20% ~ 90% RH non-condensing | | | | | | |
| | STORAGE TEMP., HUMIDITY | -20 ~ +85°C, 10 ~ 95% RH | | | | | | |
| | TEMP. COEFFICIENT | ±0.03% / °C (0 ~ 50°C) | | | | | | |
| | VIBRATION | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes | | | | | | |
| SAFETY & EMC | SAFETY STANDARDS | UL60950-1, CSA22.2, EN60950-1 approved | | | | | | |
| | WITHSTAND VOLTAGE | I/P-O/P:3KVAC | | | | | | |
| | ISOLATION RESISTANCE | I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH | | | | | | |
| | EMI CONDUCTION & RADIATION | Compliance to EN55014-1 class B, FCC part 15 Class B | | | | | | |
| | HARMONIC CURRENT | Compliance to EN61000-3-2,3 | | | | | | |
| OTHERS | DIMENSION | 108*67*36mm (L*W*H) | | | | | | |
| | PACKING | 309g; 54pcs / 19kg / CARTON | | | | | | |
| | PLUG | Standard type P1J: 2.1φ * 5.5φ * 11mm, tuning fork type center positive for stock ; Other type available by customer requested | | | | | | |
| CONNECTOR | CABLE | Standard type 18Awg UL1185 6ft and 4ft for 4.2V~8.4V output only for stock ; Other type available by customer requested | | | | | | |
| | NOTE | 1.Modification for charger specification may be required for different battery specification. Please contact battery vendor and MEAN WELL for details. 2.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient. 3.DC voltage: The output voltage set at point measure by plug terminal & 0% load. 4.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor. 5.Output charging voltage range is measured from 0% to 100% rated load. 6.Line regulation is measured from low line to high line at rated load. | | | | | | |

File Name:GC30B-SPEC 2016-01-07




16.8 ~ 30W Power Adaptor with Charging Function


GC30B series

Mechanical Specification

Unit:mm

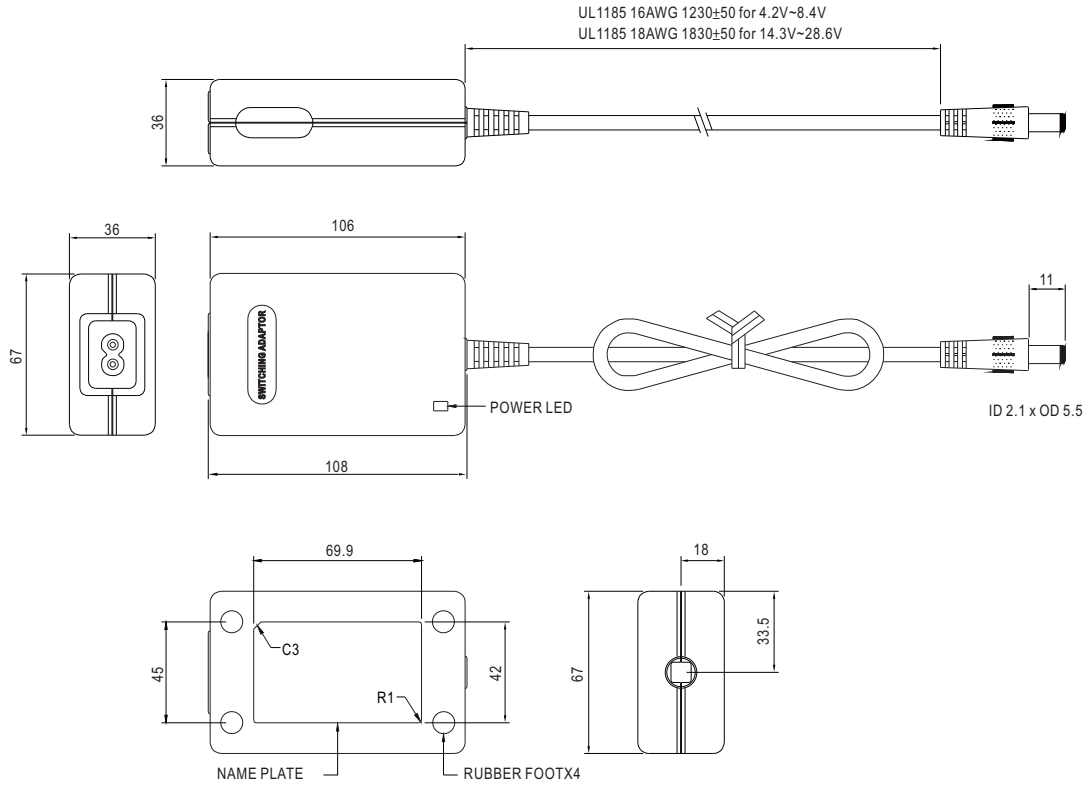

Charging Curve

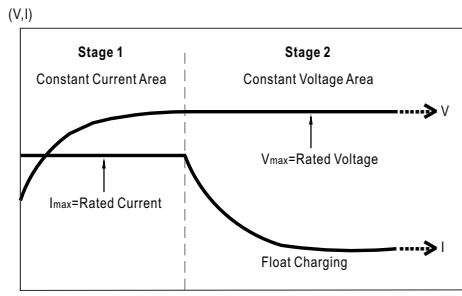

Suitable for lead-acid batteries (flooded, Gel and AGM) and Li-ion batteries (lithium iron and lithium manganese)

LED Display


| LED Status | Load Condition |
|------------|----------------|
| Red | Charging |
| Green | Float Charging |

Plug Assignment


Standard plug: P1J (option)

| P1J | |
|--------|--------|
| P/N | OUTPUT |
| CENTER | + |

Derating Curve

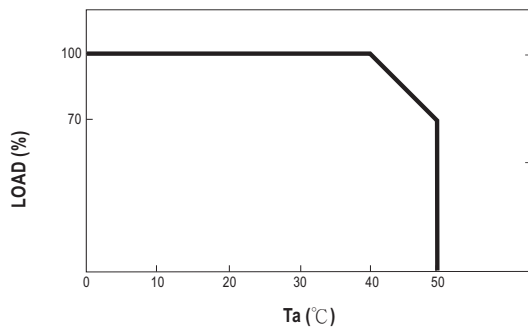

Static Characteristics

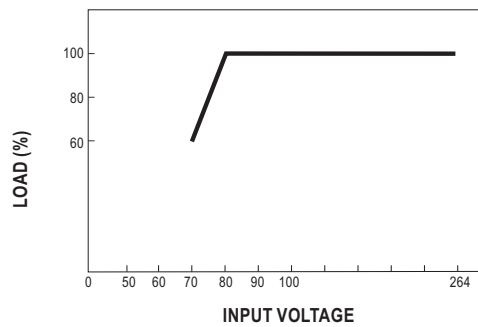

File Name:GC30B-SPEC 2016-01-07

Headquarter Switzerland:
Pewatron AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
info@pewatron.com

Office Germany:
Pewatron Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87-0
info.de@pewatron.com



PEWATRON
SENSORS · POWER SOLUTIONS

We are here for you. Addresses and Contacts.

Sales Germany & Austria

Postcode 00000 – 31999
Postcode 38000 – 39999
Postcode 80000 – 99999
Austria

Kurt Stritzelberger

Phone +49 89 260 52 80
Mobile +49 171 803 41 35

kurt.stritzelberger@pewatron.com

Postcode 32000 – 37999
Postcode 40000 – 79999

Gerhard Vetter

Phone +49 674 394 75 75
Mobile +49 163 762 74 30

gerhard.vetter@pewatron.com

Geometrical sensors
Sensor elements

Thorsten Ravagni

Phone +49 60 479 53 627

thorsten.ravagni@pewatron.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei

Phone +41 44 877 35 18
Mobile +41 76 279 37 26

basil.frei@pewatron.com

Postcode 1000 – 2999

Christian Mohrenstecher

Mobile +41 76 444 57 93

christian.mohrenstecher@pewatron.com

Sales International Key Accounts

Peter Felder

Phone +41 44 877 35 05
Mobile +41 79 406 49 83

peter.felder@pewatron.com

Sales Other Countries / Product Management

Pressure Sensors

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@pewatron.com

Accelerometers / Level Flow sensor elements

Thorsten Ravagni
Phone +49 60 479 53 627
thorsten.ravagni@pewatron.com

Drive technology CH Postcode 5000 – 9999 / DE

Roman Homa
Mobile +41 76 444 00 86
roman.homa@pewatron.com

Gas sensors / Gas sensor modules Load cells

Dr. Thomas Clausen
Phone +41 44 877 35 13
thomas.clausen@pewatron.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@pewatron.com

Drive technology CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Mobile +41 76 444 57 93
christian.mohrenstecher@pewatron.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 8245 774 95 44
adriano.pittarelli@pewatron.com

Linear position sensors Angle sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@pewatron.com

Current sensors Power solutions

Osman Coban
Phone +49 71 635 363 898
osman.coban@pewatron.com