



PROTEK POWER

## 220 WATT SWITCHING POWER SUPPLIES

### DESCRIPTION

The PUP220 series of AC/DC switching power supplies are for 220 watts of continuous output power. They are enclosed in a 94V-1 rated polyphenylene-oxide case with an IEC320/C14 inlet to mate with interchangeable cord for world-wide use. All models meet CISPR 22 and FCC class B emission limits, and comply with UL, TUV and CE requirement.

### FEATURES

- High Efficiency
- Overvoltage protection
- Short-circuit protection
- Overpower protection
- Over temperature protection
- Compliant with CEC and Energy Star Efficiency level V requirements
  - \* No load power consumption less than 0.5 W
  - \* Average active efficiency  $\geq 87\%$
- Compliant with RoHS requirement

### INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	50-60 Hz
Input current:	3 A (rms) for 100 VAC 1.3 A (rms) for 240 VAC
Touch current:	250 $\mu$ A max. @ 264 VAC, 60 Hz

### OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart.
Total output power:	See rating chart.
Ripple and noise:	380 mV peak to peak maximum
Overvoltage protection:	set at 112-145% of its nominal output voltage.
Overcurrent protection:	All models protected to short circuit conditions
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 $\mu$ s after a 25% step load change

### ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0 $^{\circ}$ C to +40 $^{\circ}$ C
Storage temperature:	-20 $^{\circ}$ C to +80 $^{\circ}$ C
Relative humidity:	10% to 90% non-condensing

### PUP220 SERIES




### SAFETY STANDARD APPROVALS



UL 60950-1, CSA C22.2 No. 60950-1



TUV EN60950-1

### GENERAL SPECIFICATIONS

Hold-up time:	5 ms minimum at 110 VAC or 240 VAC
Efficiency:	87% minimum at full load
Turn on delay time:	3 seconds maximum at 110 VAC
Inrush current:	No damage
Withstand voltage:	1500 VAC from input to output and ground
MTBF:	100,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per MIL-HDBK-217F

### EMC Performance (EN55022)

EN55022:	Class B conducted, class B radiated
FCC:	Class B conducted, class B radiated
VCCI:	Class B conducted, class B radiated
EN61000-3-2:	Harmonic distortion, class D
EN61000-3-3:	Line flicker
EN61000-4-2:	ESD, $\pm 15$ KV air and $\pm 8$ KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, $\pm 1$ KV
EN61000-4-5:	Surge, $\pm 1$ KV diff., $\pm 2$ KV com
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms and >95% reduction for 10 ms

# UNIVERSAL INPUT


# PUP220 SERIES

## OUTPUT VOLTAGE/CURRENT RATING CHART

Model <sup>(2)</sup>	Output						Average Active efficiency (typical) @ 115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise <sup>(1)</sup>	Max. Power	
PUP220-12	12 V	0 A	15.00 A	5%	380 mV	180 W	88 / 90 %
PUP220S-12	12 V	0 A	15.00 A	5%	380 mV	180 W	88 / 90 %
PUP220-13-2	19 V	0 A	11.57 A	5%	380 mV	220 W	90 / 92 %
PUP220-14	24 V	0 A	9.16 A	5%	380 mV	220 W	88 / 90 %
PUP220-18	48 V	0 A	4.58 A	5%	480 mV	220 W	92 / 93 %

- NOTES: 1. Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 47  $\mu$ F electrolytic capacitor in parallel with a 0.1  $\mu$ F ceramic capacitor across the output.  
2. PUP220 models are equipped with IEC320/C14 inlet, and PUP220S models with IEC320/C6 inlet.

## MECHANICAL SPECIFICATIONS

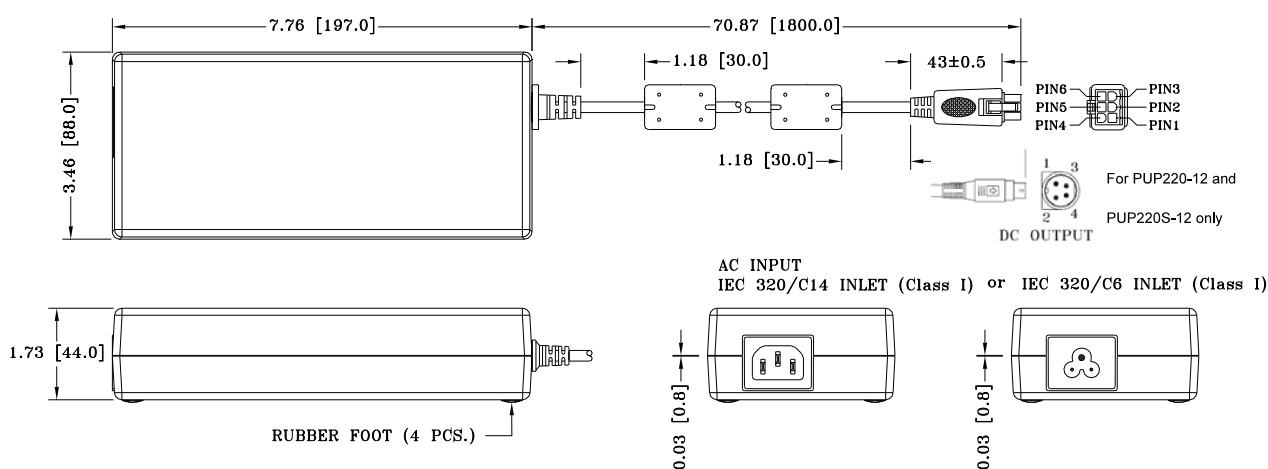

### NOTES:

- Dimensions shown in inches [mm]
- Tolerance 0.02 [0.5] maximum
- Weight: 1.0 Kg (2.2 lbs.) approx.
- The length of output cable for PUP220-13-2 is 37.4 [950.0]
- Output connector for PUP220-12 and PUP220S-12 is 4-pin plug without lock (molding type), mating with 4-pin socket, Kycon P/N KPJX-4S-S or equivalent.
- Output connector for PUP220-13-2, PUP220-14 and PUP220-18 is Molex Mini - Fit receptacle, P/N: 39-01-2060 with female terminal #5556 or equivalent, mating with Molex plug 39-01-2066 and male terminal #5558 or equivalent. It also mates with Molex headers #5566, #5569, or equivalent.

## PIN CHART

MODEL \ PIN	PIN				SHELL OF CONNECTOR
	1	2	3	4	
PUP220-12 PUP220S-12	+V1		V1 Return & AC Ground		

MODEL \ PIN	PIN					
	1	2	3	4	5	6
PUP220-13-2 PUP220-14 PUP220-18	V1 Return & AC Ground			+V1		

Headquarter Switzerland:  
Pewatron AG  
Thurgauerstrasse 66  
CH-8050 Zurich  
Phone +41 44 877 35 00  
info@pewatron.com

Office Germany:  
Pewatron Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim  
Phone +49 89 374 288 87-0  
info.de@pewatron.com



**PEWATRON**  
SENSORS · POWER SOLUTIONS

## We are here for you. Addresses and Contacts.

---

### Sales Germany & Austria

Postcode 00000 – 31999  
Postcode 38000 – 39999  
Postcode 80000 – 99999  
Austria

Kurt Stritzelberger

Phone +49 89 260 52 80  
Mobile +49 171 803 41 35

kurt.stritzelberger@pewatron.com

Postcode 32000 – 37999  
Postcode 40000 – 79999

Gerhard Vetter

Phone +49 674 394 75 75  
Mobile +49 163 762 74 30

gerhard.vetter@pewatron.com

**Geometrical sensors**  
**Sensor elements**

Thorsten Ravagni

Phone +49 60 479 53 627

thorsten.ravagni@pewatron.com

---

### Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei

Phone +41 44 877 35 18  
Mobile +41 76 279 37 26

basil.frei@pewatron.com

Postcode 1000 – 2999

Christian Mohrenstecher

Mobile +41 76 444 57 93

christian.mohrenstecher@pewatron.com

### Sales International Key Accounts

Peter Felder

Phone +41 44 877 35 05  
Mobile +41 79 406 49 83

peter.felder@pewatron.com

---

### Sales Other Countries / Product Management

#### Pressure Sensors

Philipp Kistler  
Phone +41 44 877 35 03  
philipp.kistler@pewatron.com

#### Accelerometers / Level Flow sensor elements

Thorsten Ravagni  
Phone +49 60 479 53 627  
thorsten.ravagni@pewatron.com

#### Drive technology CH Postcode 5000 – 9999 / DE

Roman Homa  
Mobile +41 76 444 00 86  
roman.homa@pewatron.com

#### Gas sensors / Gas sensor modules Load cells

Dr. Thomas Clausen  
Phone +41 44 877 35 13  
thomas.clausen@pewatron.com

#### Power supplies

Sebastiano Leggio  
Phone +41 44 877 35 06  
sebastiano.leggio@pewatron.com

#### Drive technology CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher  
Mobile +41 76 444 57 93  
christian.mohrenstecher@pewatron.com

#### Flow / Level / Medical products

Dr. Adriano Pittarelli  
Phone +49 8245 774 95 44  
adriano.pittarelli@pewatron.com

#### Linear position sensors Angle sensors

Eric Letsch  
Phone +41 44 877 35 14  
eric.letsch@pewatron.com

#### Current sensors Power solutions

Osman Coban  
Phone +49 71 635 363 898  
osman.coban@pewatron.com